




ITT

POMPODIRECT

DLC SERIES HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 2 POLES

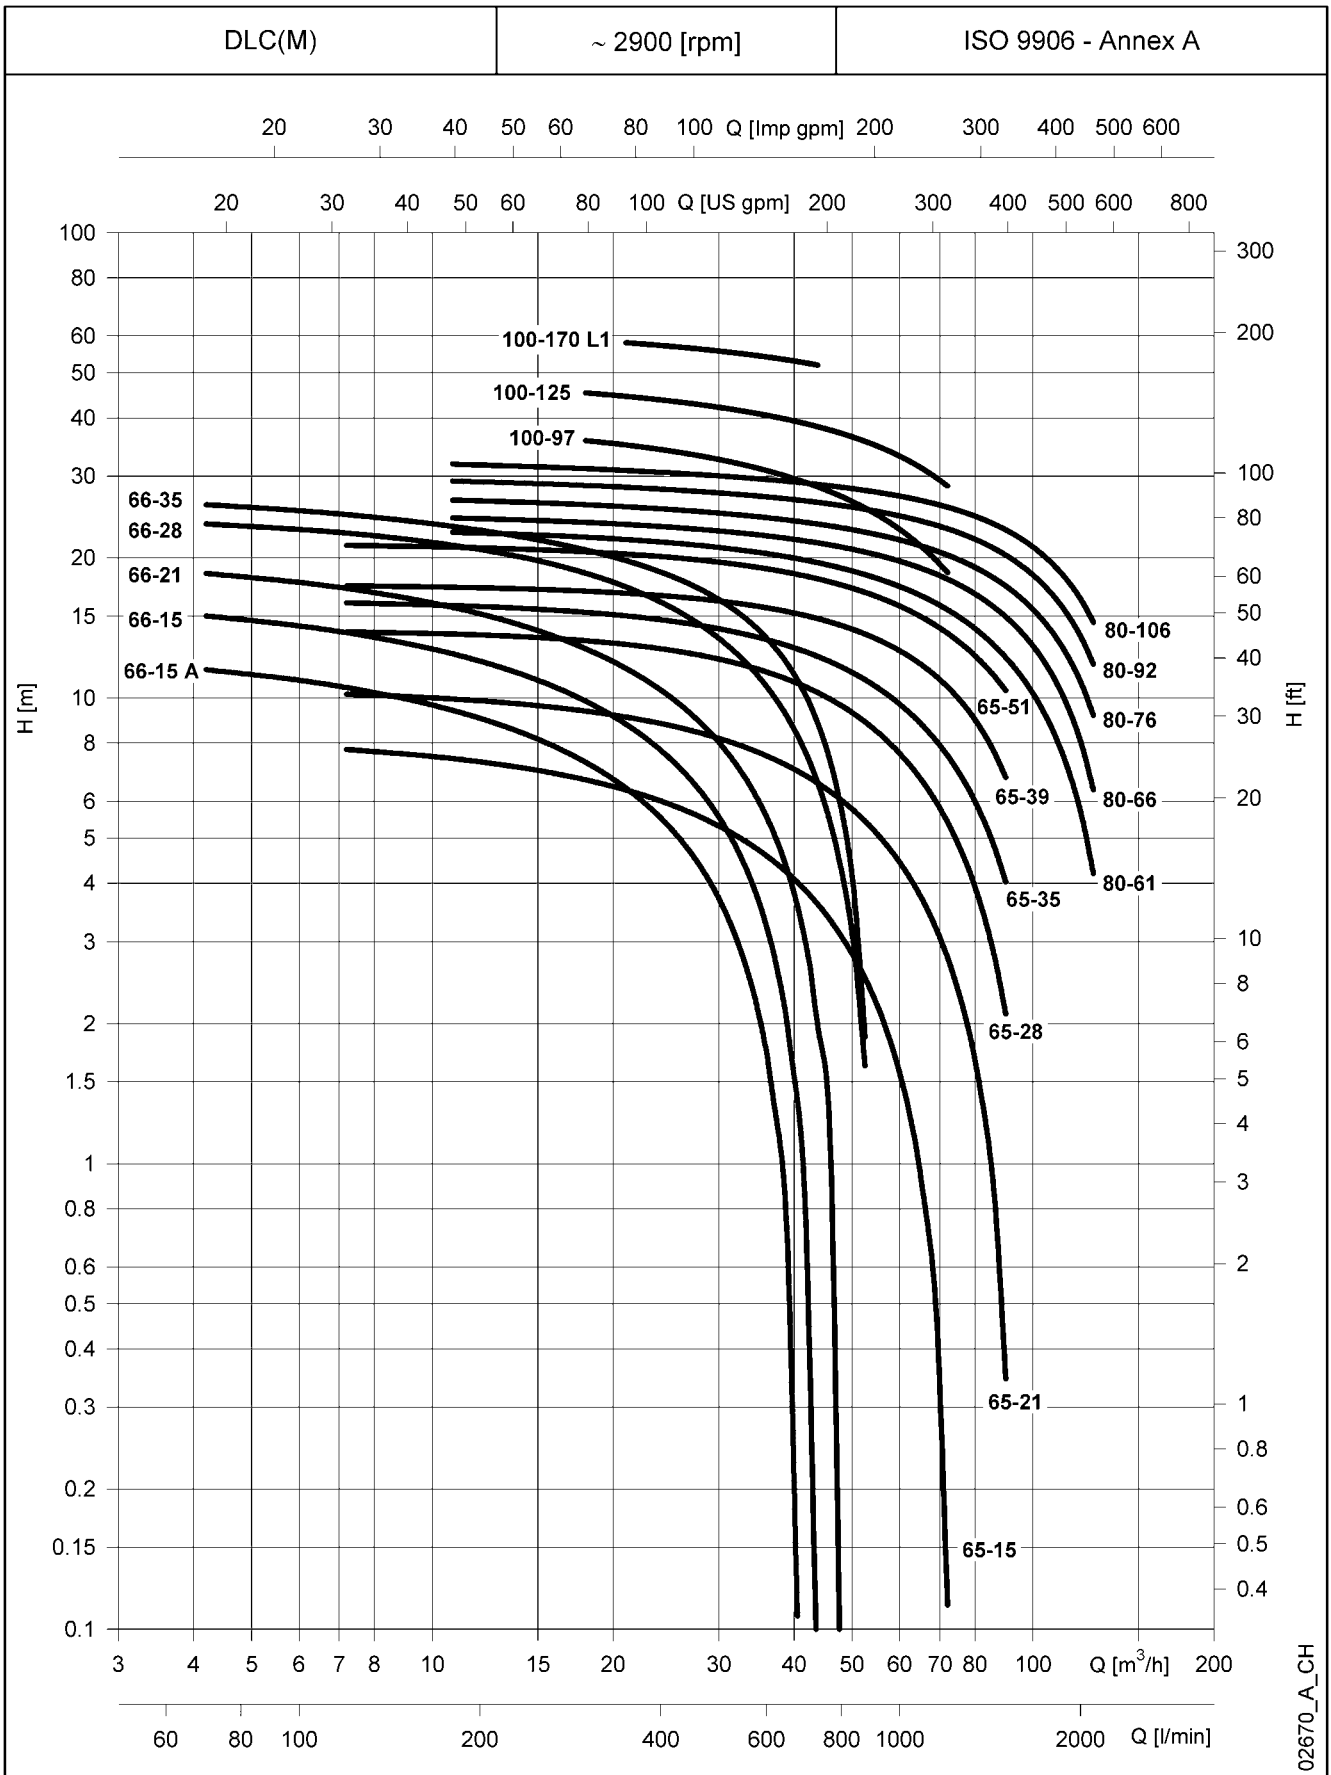

02670_A_CH


These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.



ITT

POMPODIRECT

DLC4 SERIES HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 4 POLES

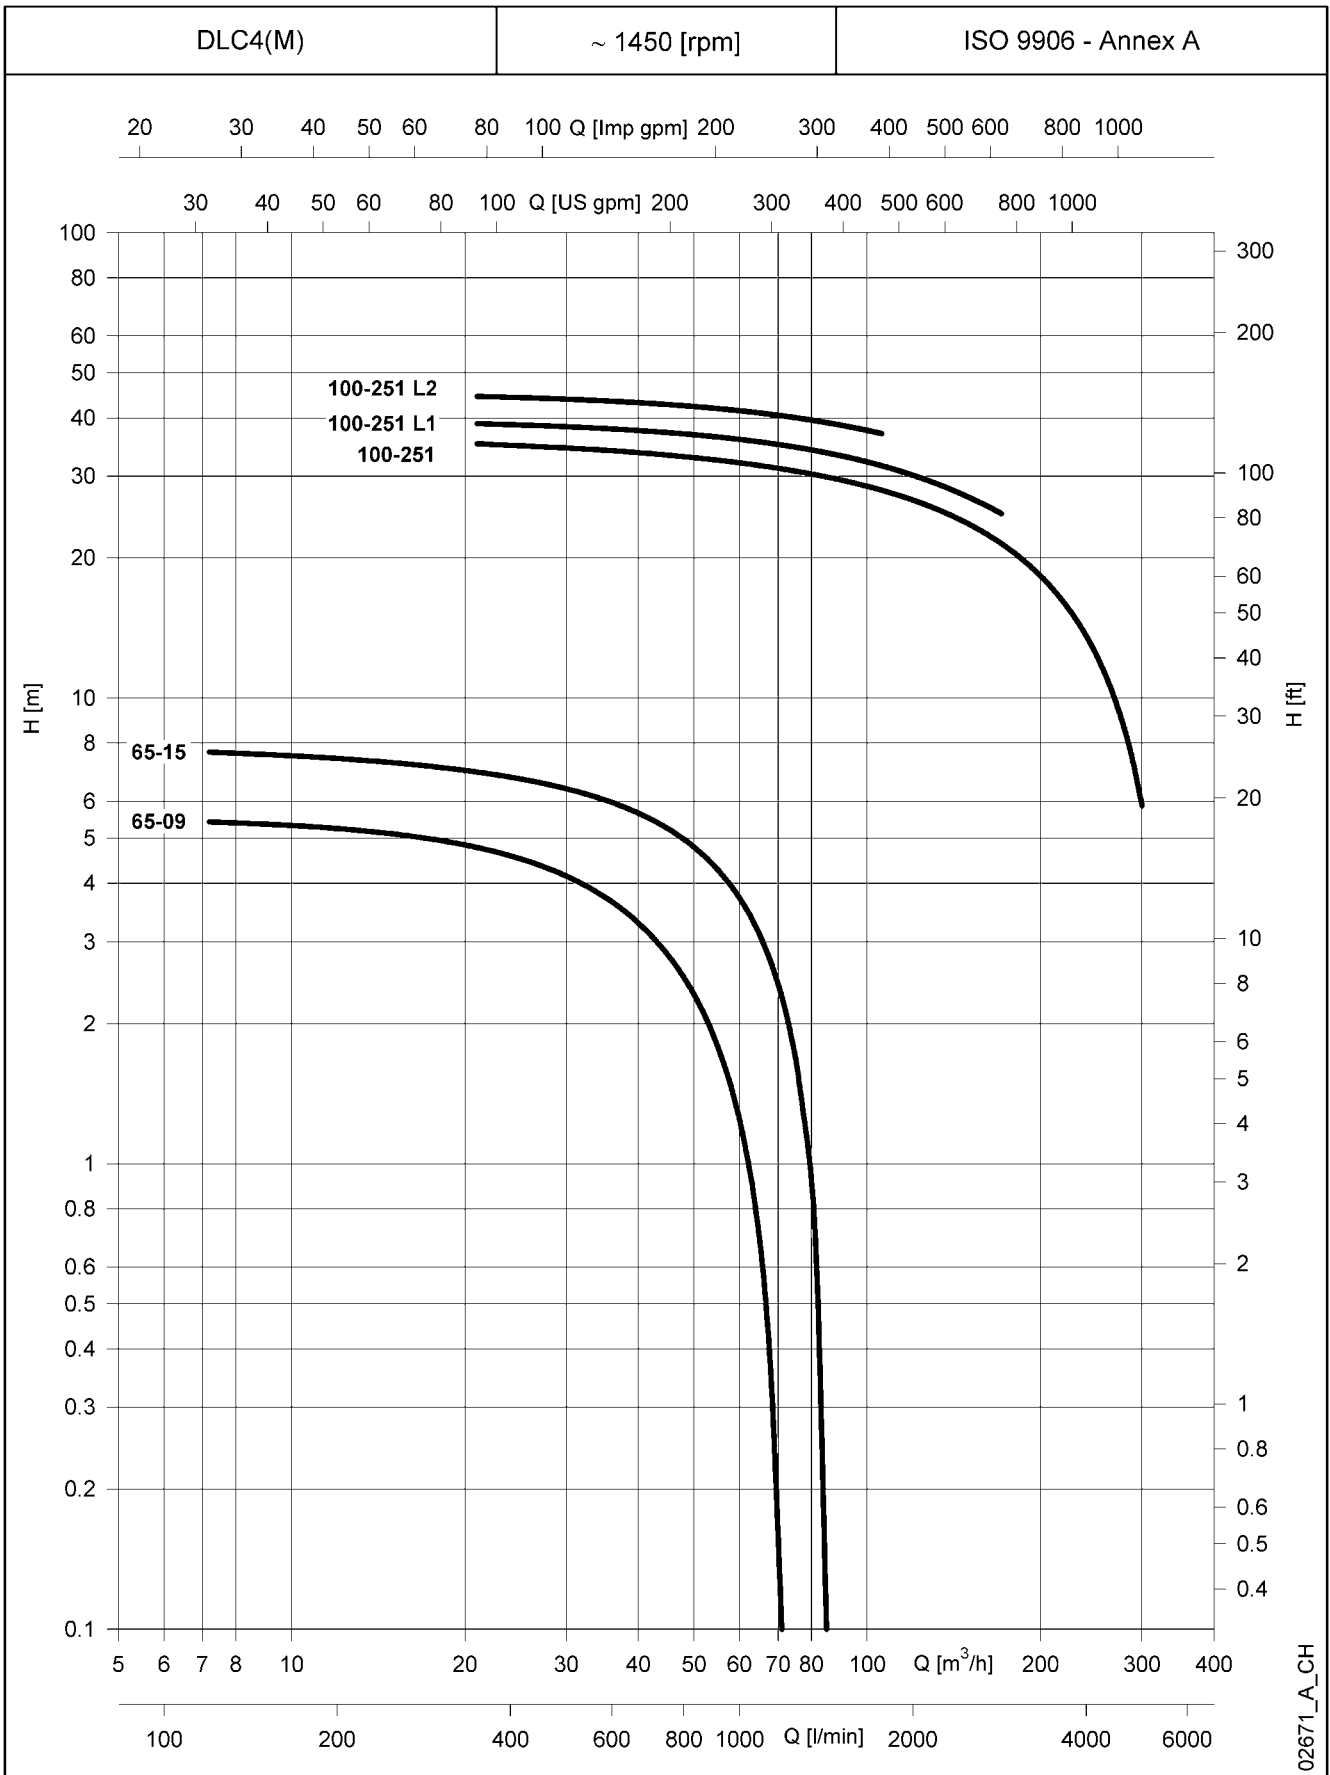


These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.



ITT

POMPODIRECT

DLC6 SERIES HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 6 POLES

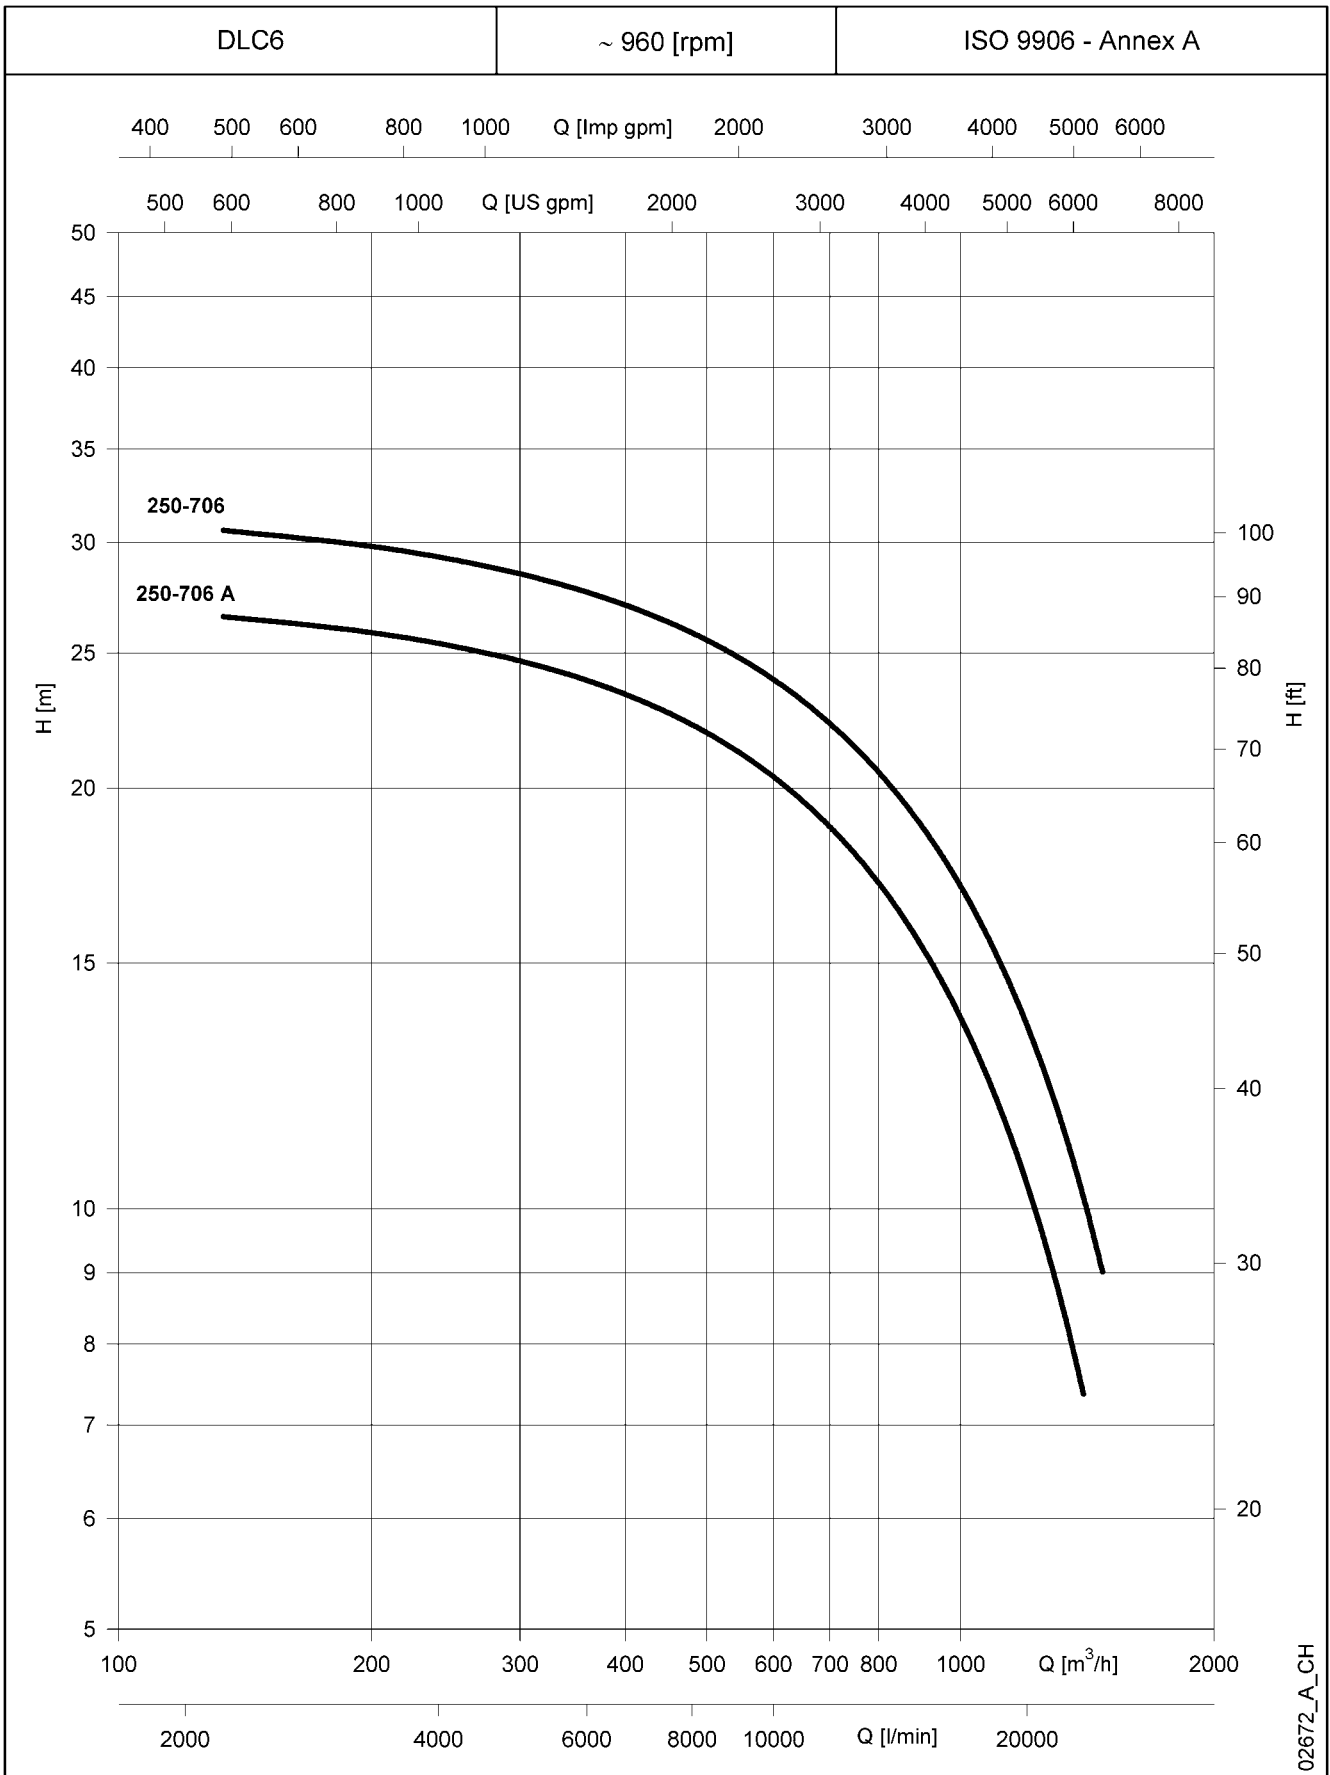

02672_A_CH


These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.



ITT

POMPODIRECT

DLC8 SERIES HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 8 POLES

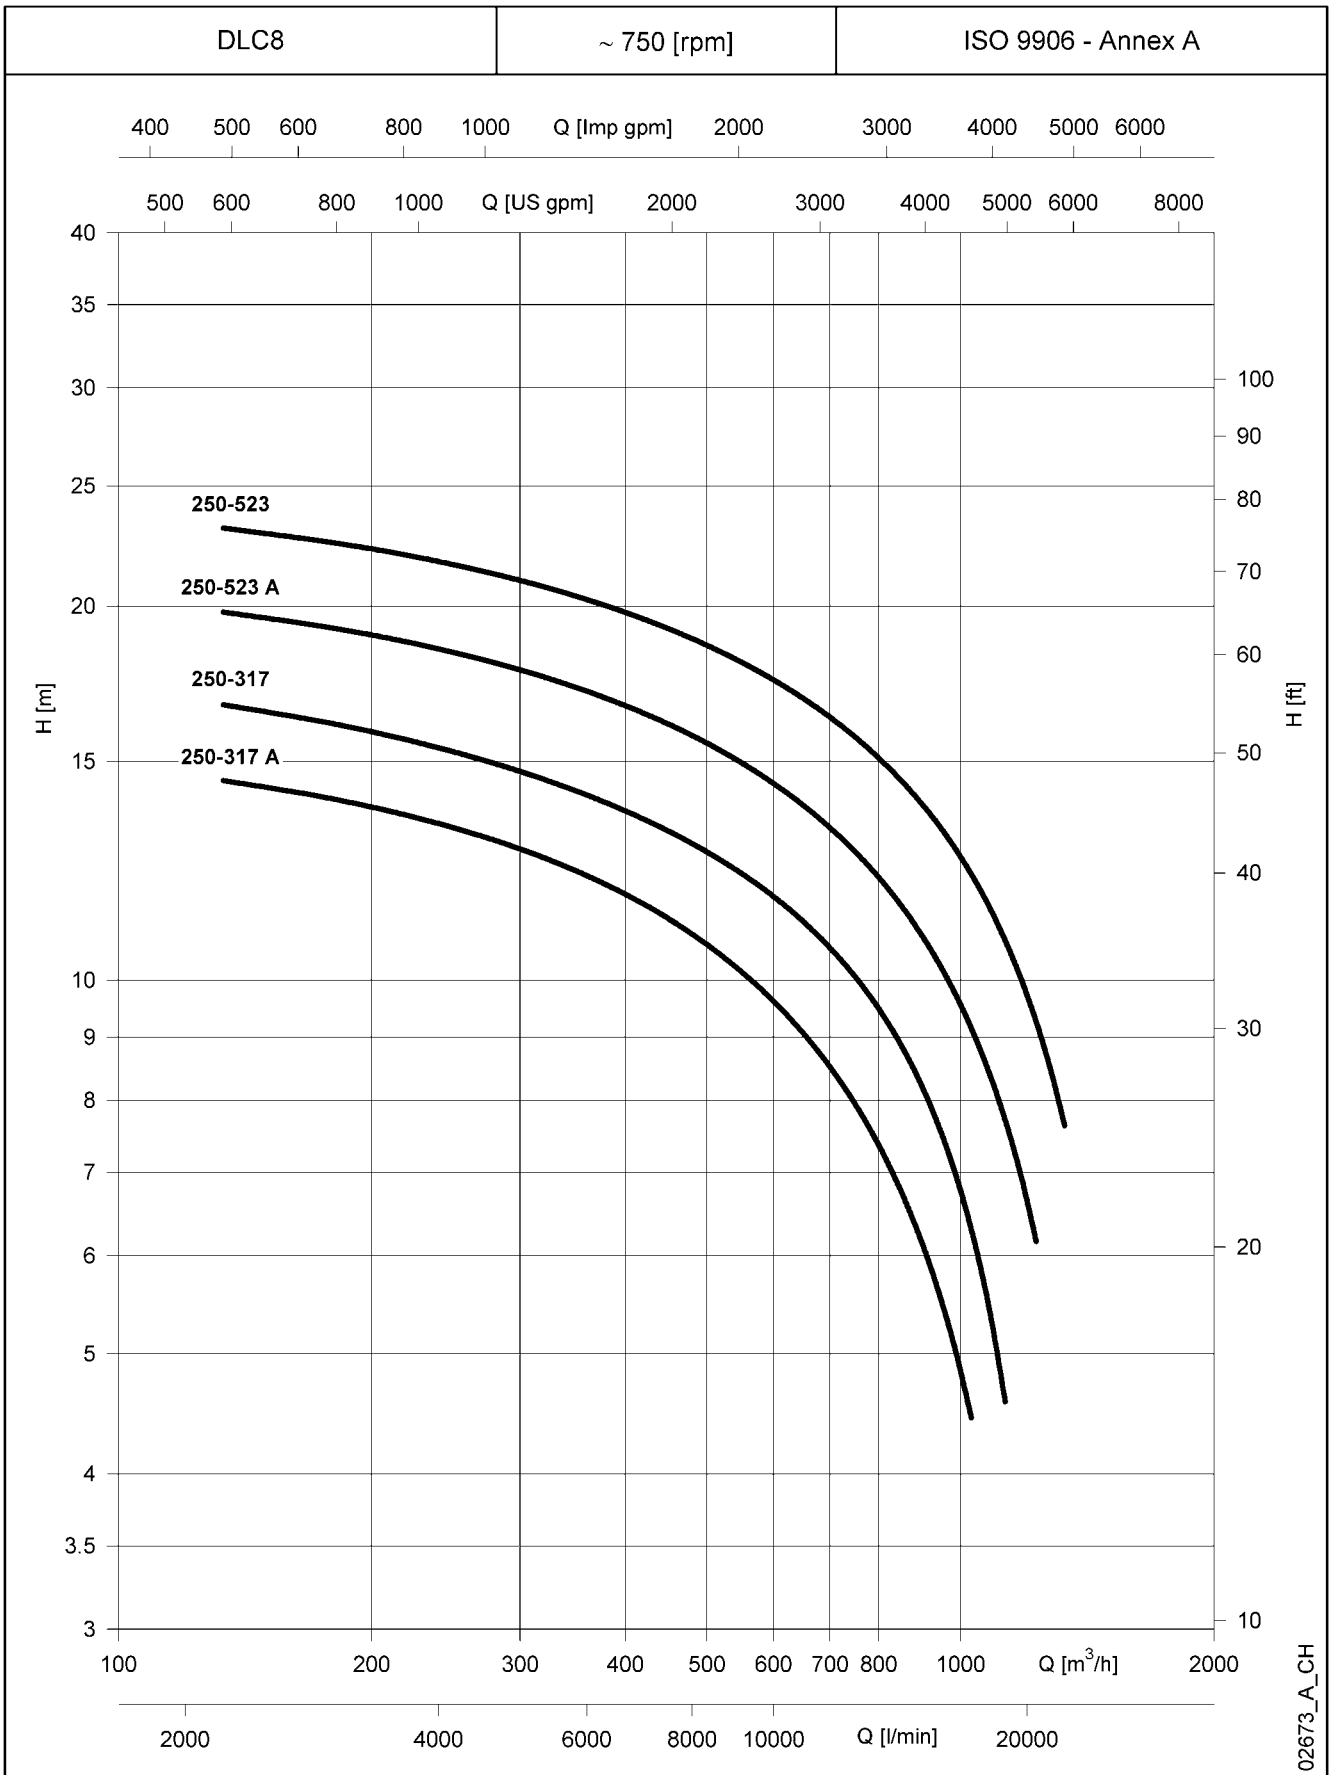

These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.