




ITT

POMPODIRECT

DLV SERIES HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 2 POLES

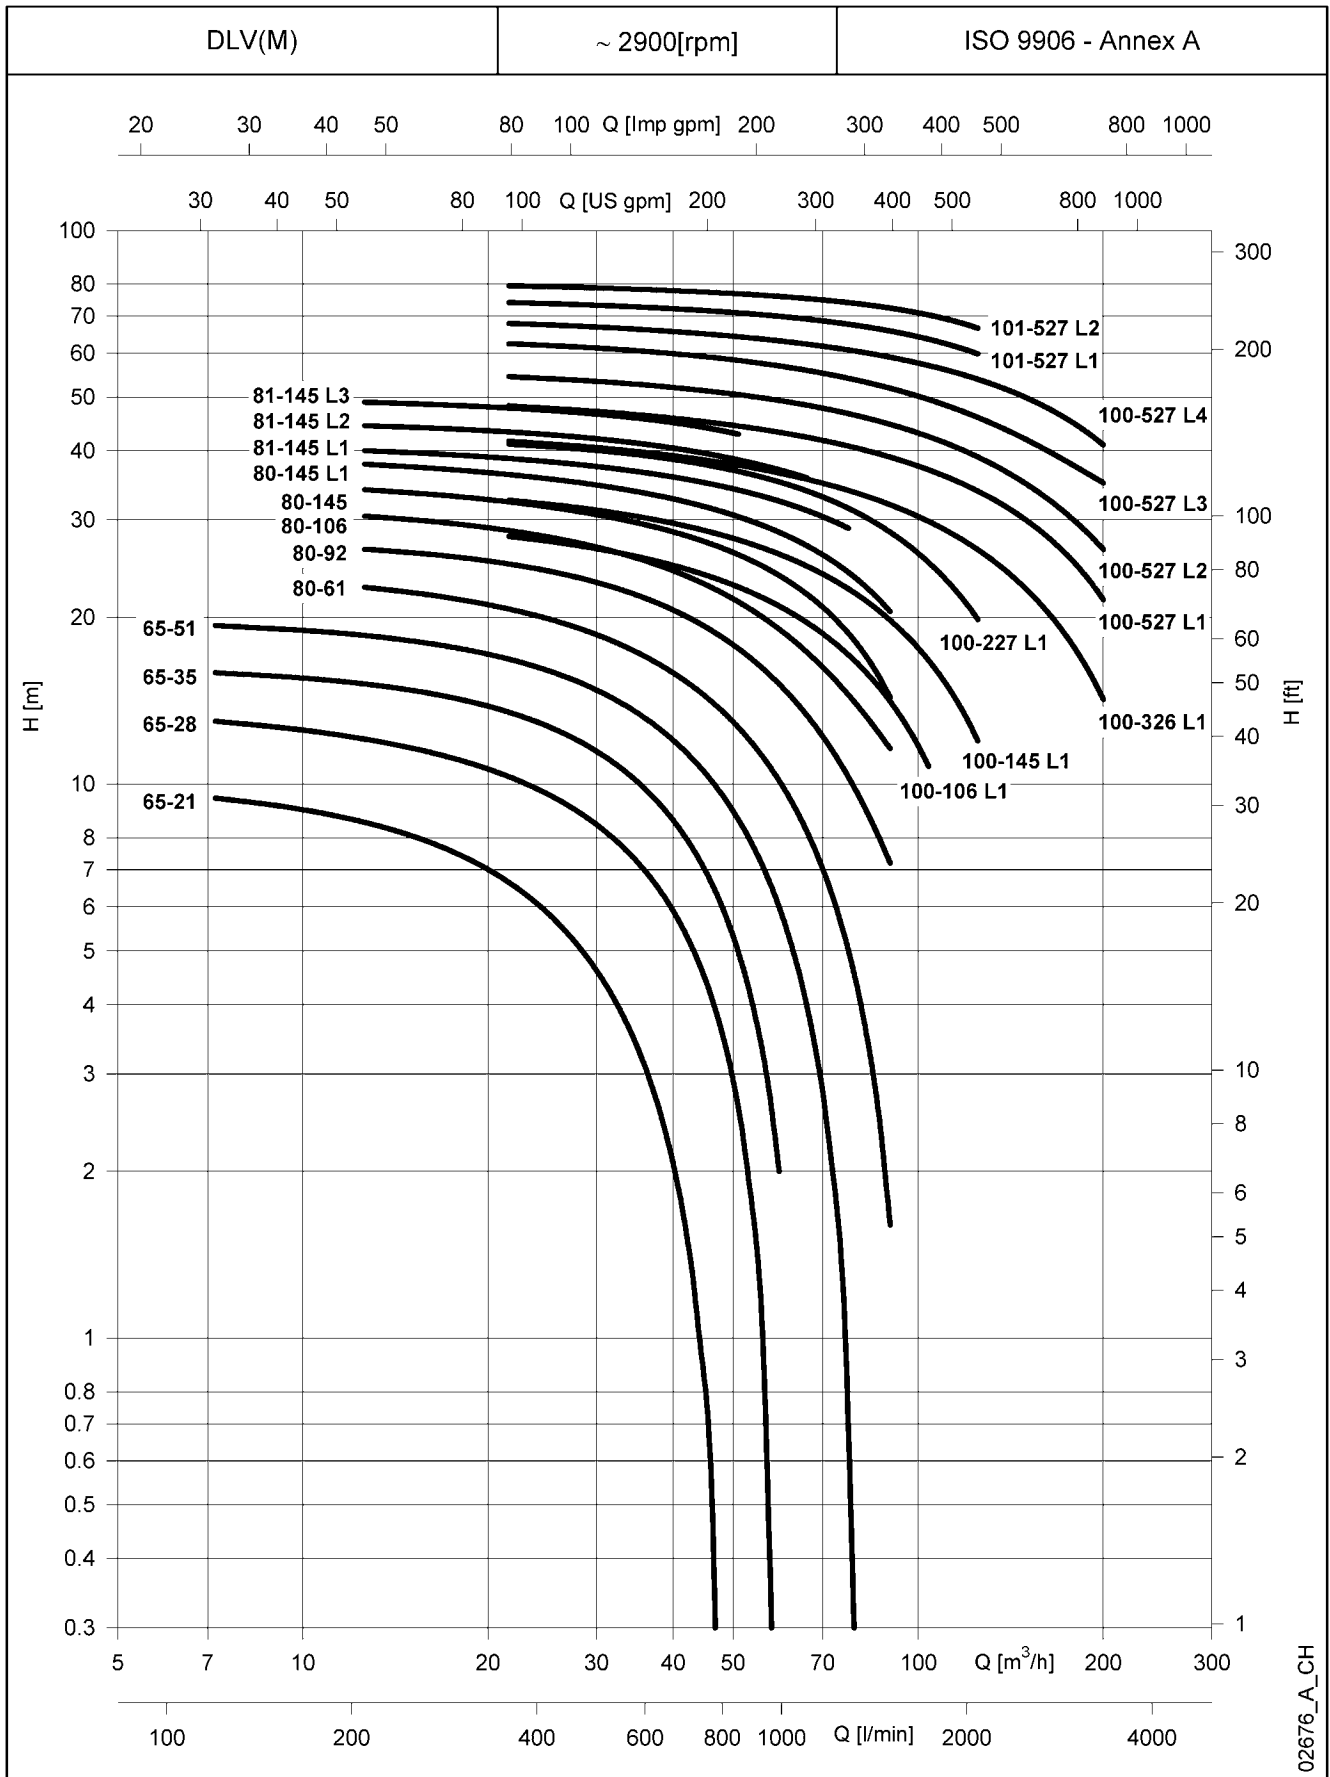

02676_A_CH


These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.



ITT

POMPOIRECT

DLV4 SERIES HYDRAULIC PERFORMANCE RANGE AT 50 Hz, 4 POLES

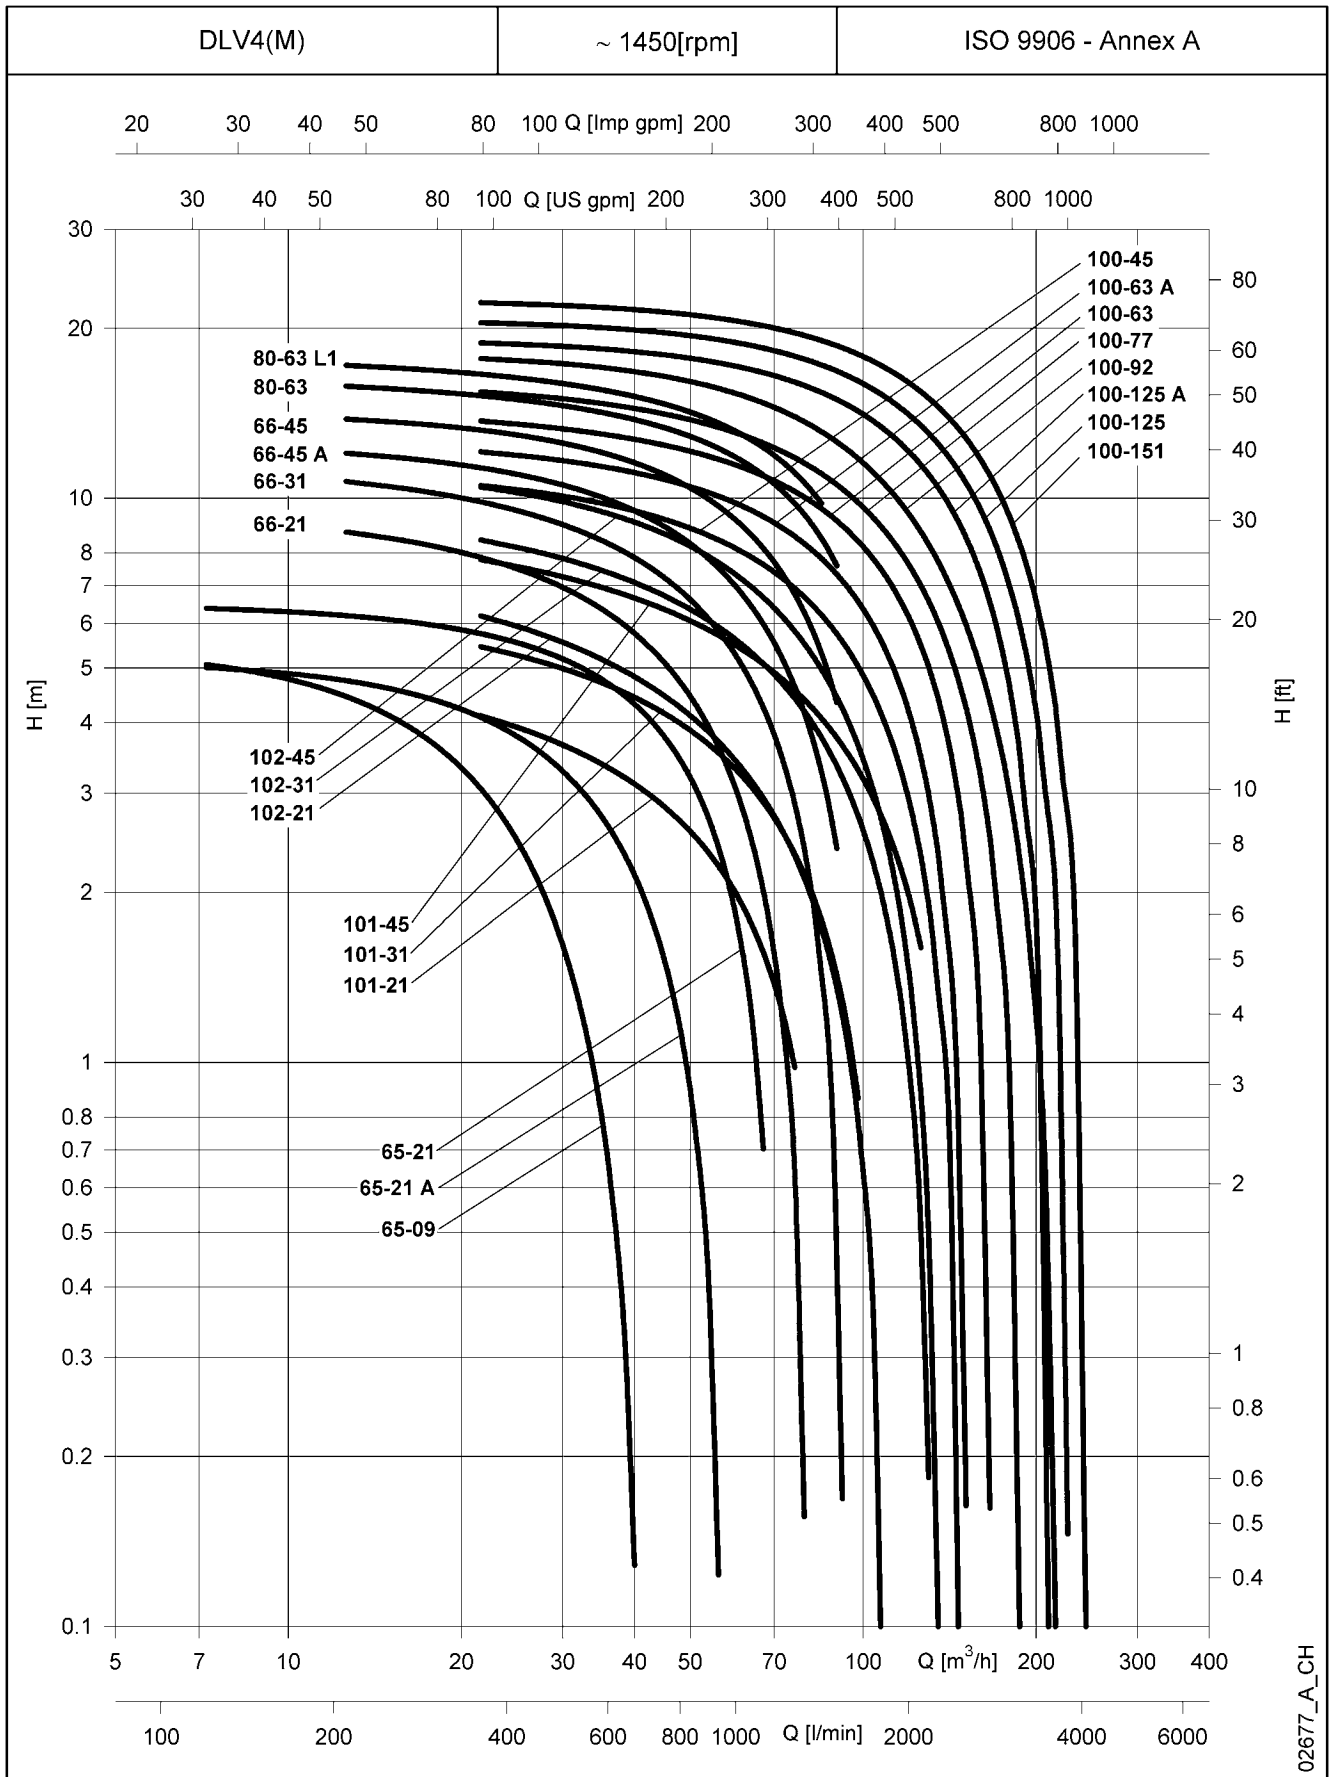

02677_A_CH

These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.