CS 3201 MT 3~ 637

Technische specificaties

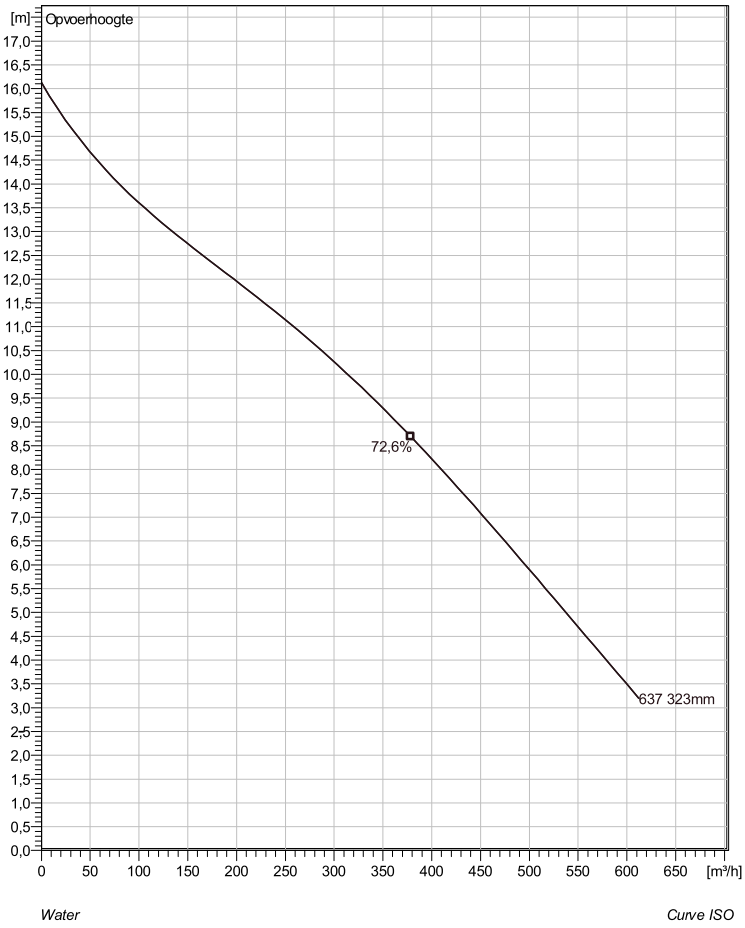

Note: Picture might not correspond to the current configuration.

Soort installatie: Semi permanent, Nat

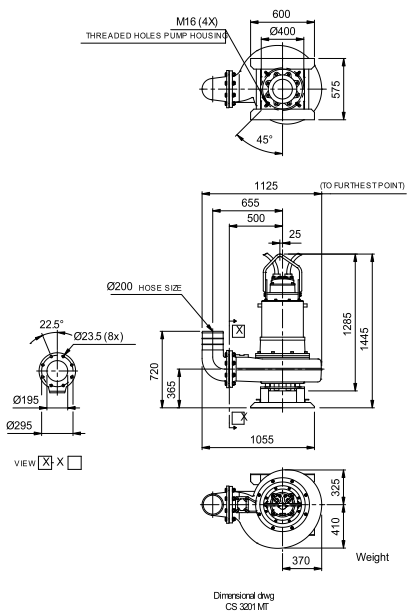

General

Dompelbare pompen voorzien van één of meerkanaalwaaier met grote doorlaat. Geschikt voor afvalwater met grotere delen zoals rioolwater, regenwater en industrieel afvalwater. Materiaal gietijzer.

Impeller

Impeller material	Stainless steel
Persaansluiting	200 mm
Diameter aanzuigzijde	200 mm
Impeller diameter	323 mm
Aantal bladen	2
Throughlet diameter	84 mm

Motor

Motor #	C3201.280 27-26-6AA-W 22KW standaard
Stator variant	28
Frequentie	50 Hz
Nominale spanning	190 V
Aantal polen	6
Fasen	3~
Nominaal vermogen	22 kW
Toegekende stroom	97 A
Aanloopstroom	665 A
Nominaal toerental	970 rpm
Vermogensfactor	
1/1 Load	0,80
3/4 Load	0,73
1/2 Load	0,61
Motor efficiency	
1/1 Load	86,5 %
3/4 Load	86,0 %
1/2 Load	83,5 %

T +31 (0)294-457712
F +31 (0)294-457713
www.flygtpompen.nl
info@pompdirect.nl

Project	Project ID	Created by	Created on	Last update
			10/4/2018	

contactformulier

CS 3201 MT 3~ 637

Karakteristiek

Pomp

Persaansluiting	200 mm
Diameter aanzuigzijde	200 mm
Impeller diameter	323 mm
Aantal bladen	2
Throughlet diameter	84 mm

Motor

Motor #	C3201.280 27-26-6AA-W 22KW
Stator variant	28
Frequentie	50 Hz
Nominale spanning	190 V
Aantal polen	6
Fasen	3~
Nominaal vermogen	22 kW
Toegekende stroom	97 A
Aanloopstroom	665 A
Nominaal toerental	970 rpm

Vermogensfactor	
1/1 Load	0,80
3/4 Load	0,73
1/2 Load	0,61

Motor efficiency	
1/1 Load	86,5 %
3/4 Load	86,0 %
1/2 Load	83,5 %

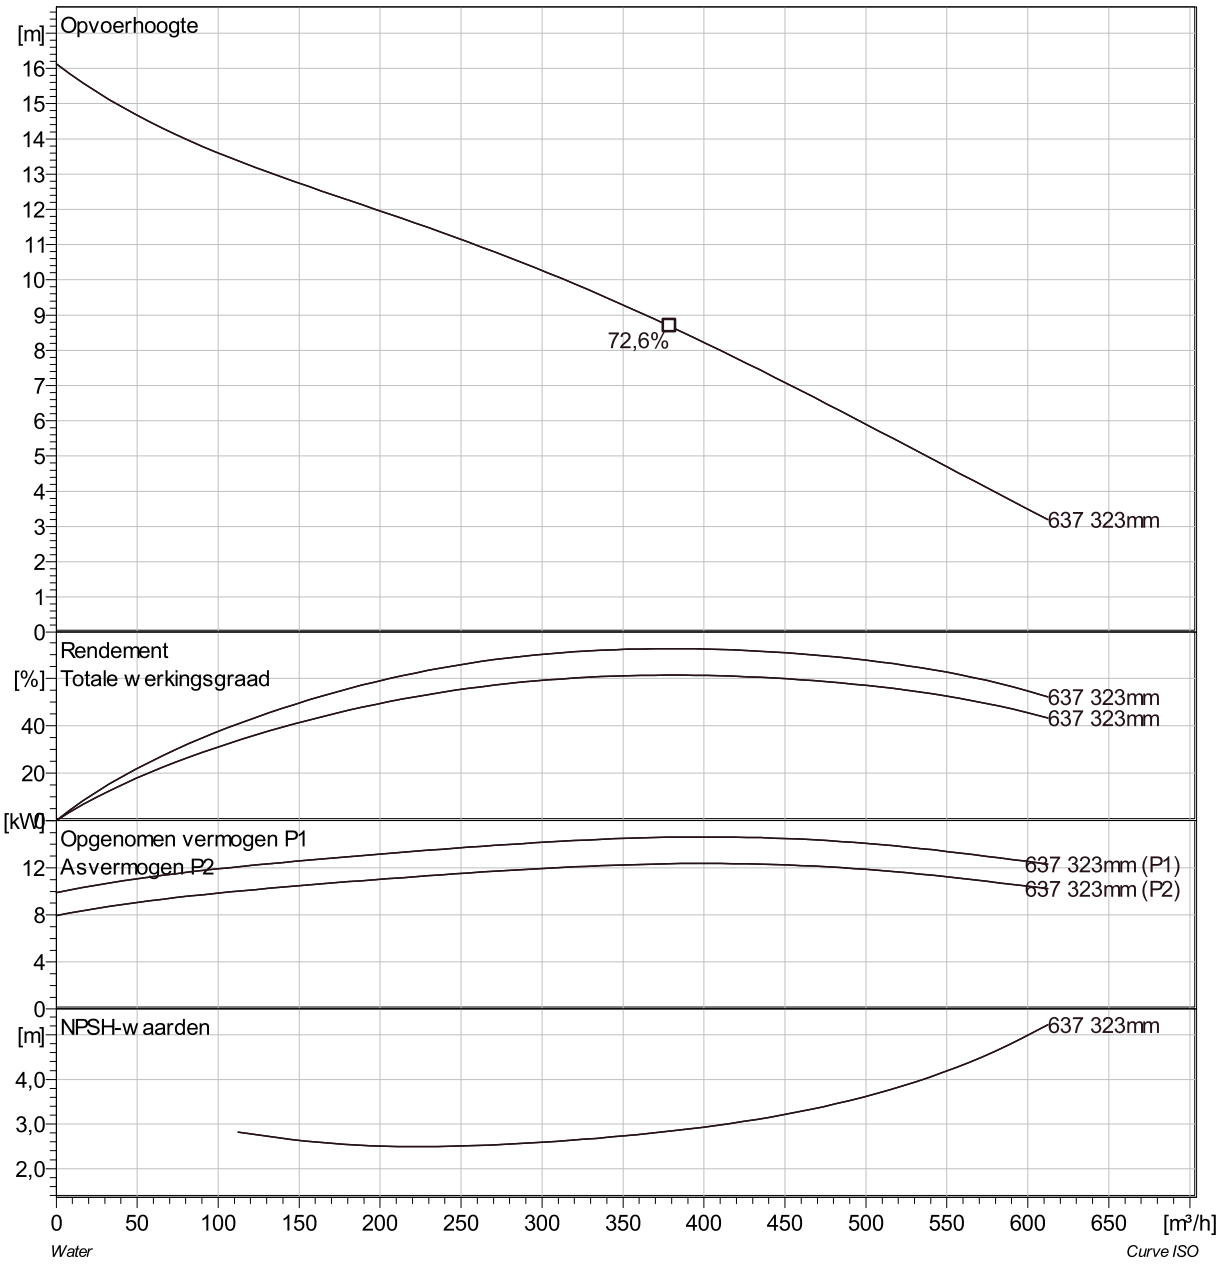

Project	Project ID	Created by	Created on	Last update
			10/4/2018	

CS 3201 MT 3~ 637

VFD Analysis

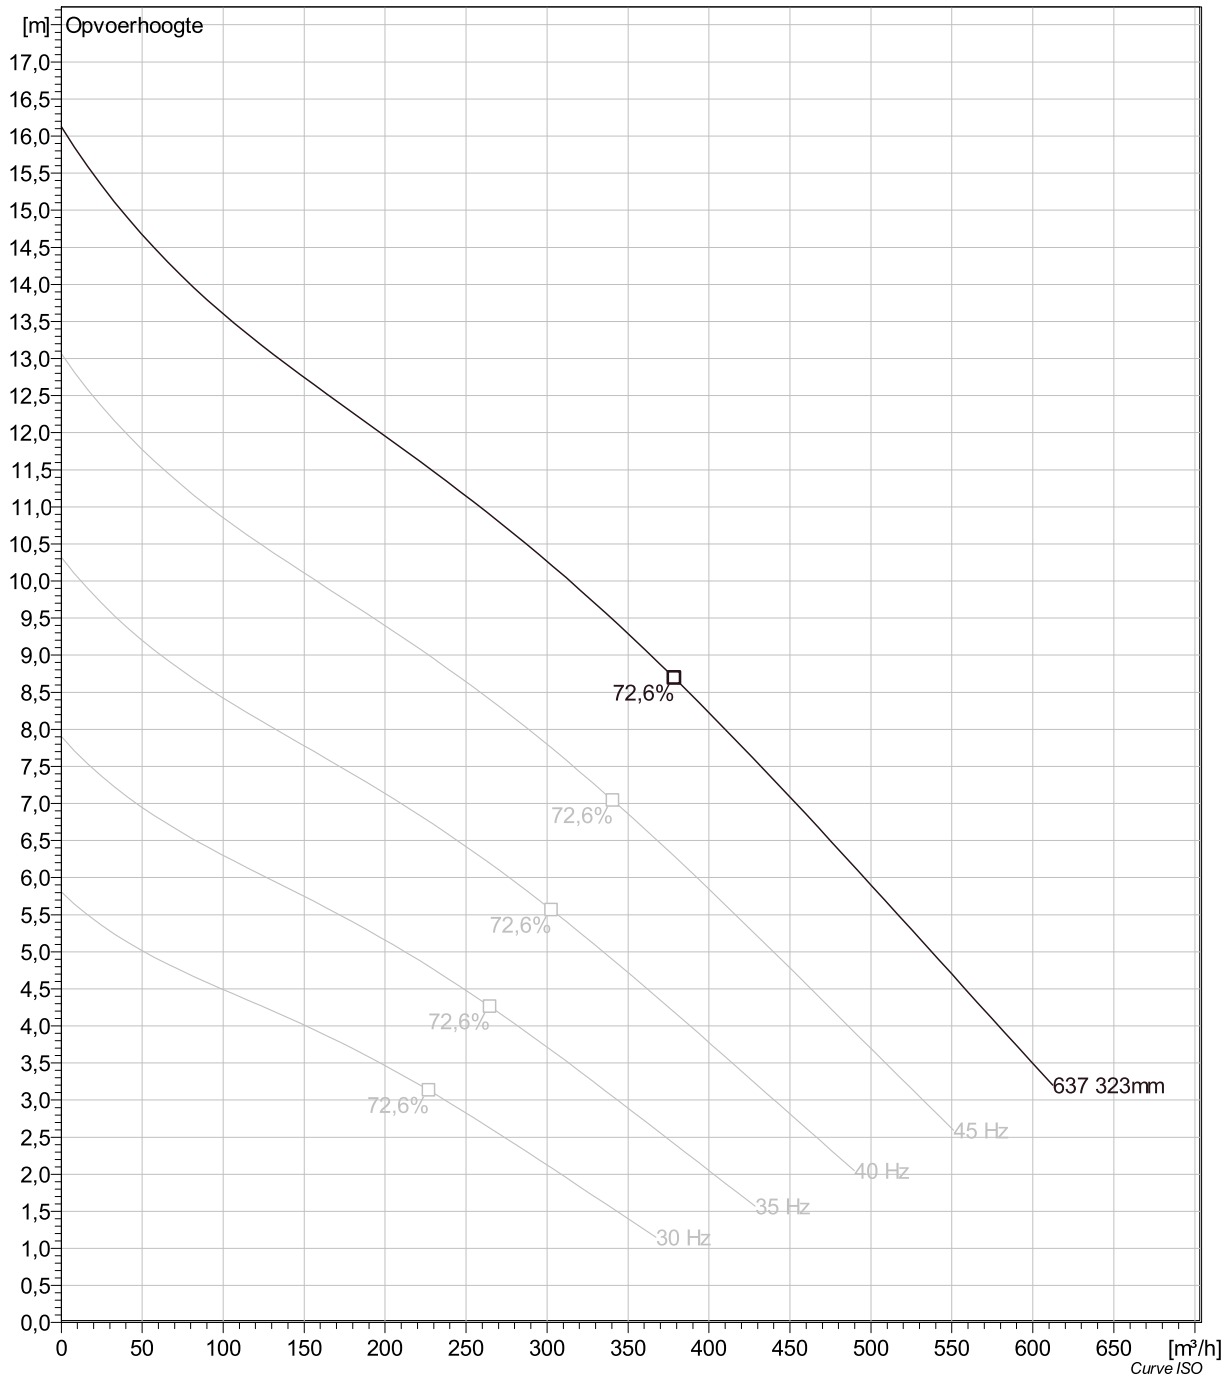

Project	Project ID	Created by	Created on	Last update
			10/4/2018	

CS 3201 MT 3~ 637

Dimensional drawing

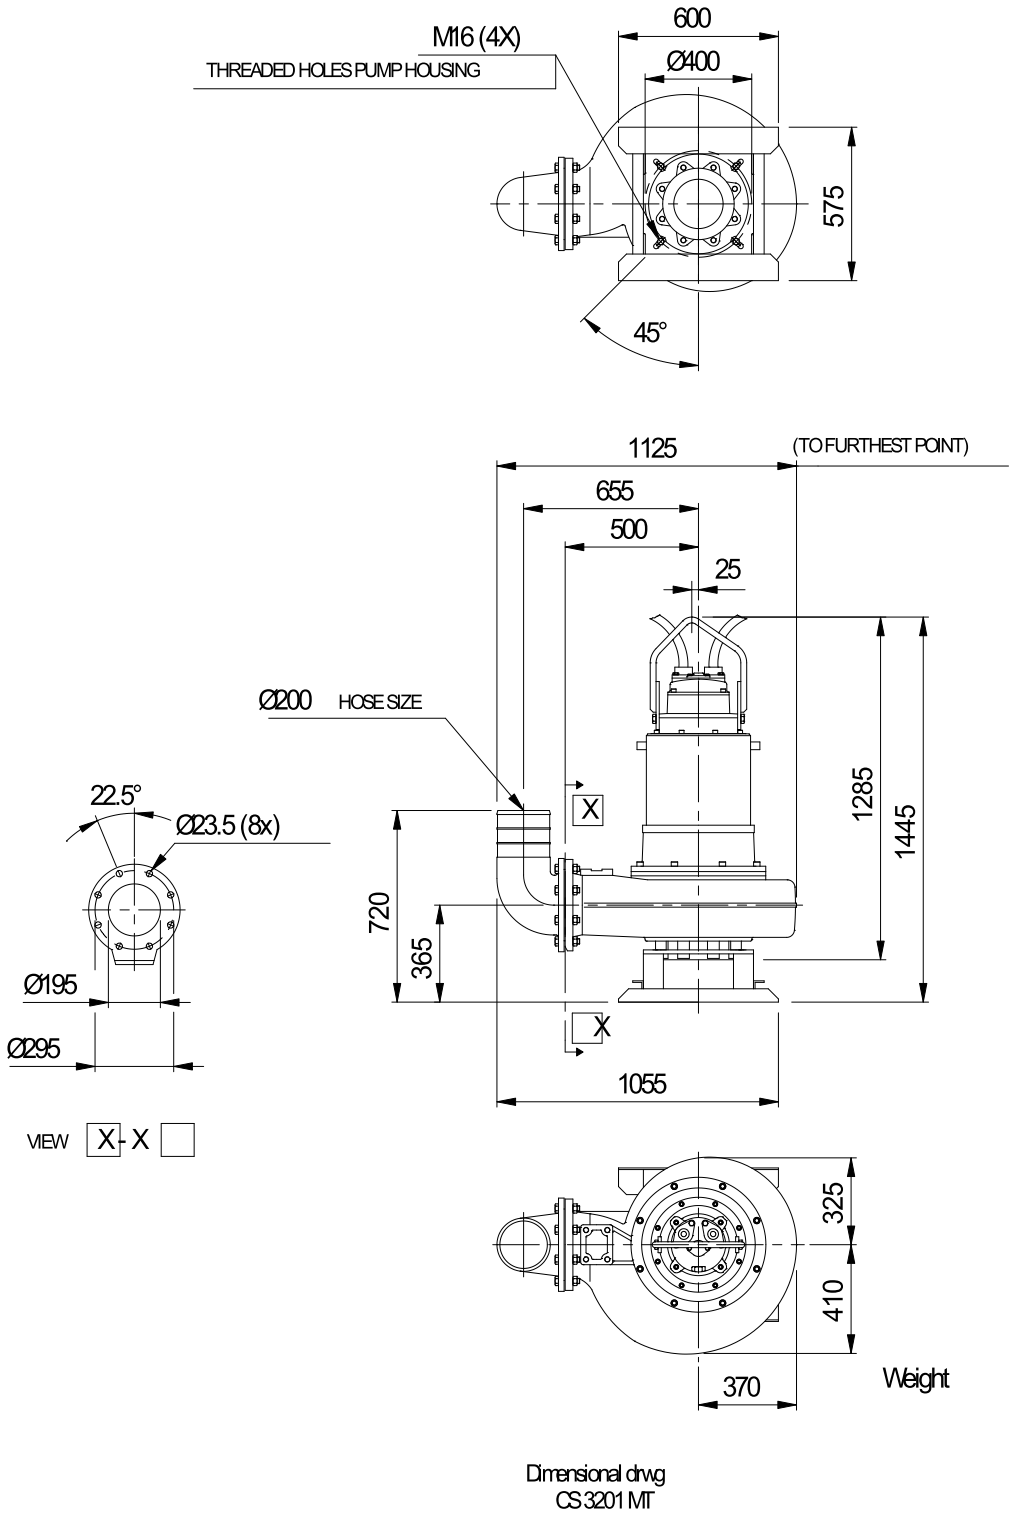

Dimensional drwg
CS 3201 MT

Project	Project ID	Created by	Created on	Last update
			10/4/2018	