



NS 3315 HT 3~ 457

Technische specificaties

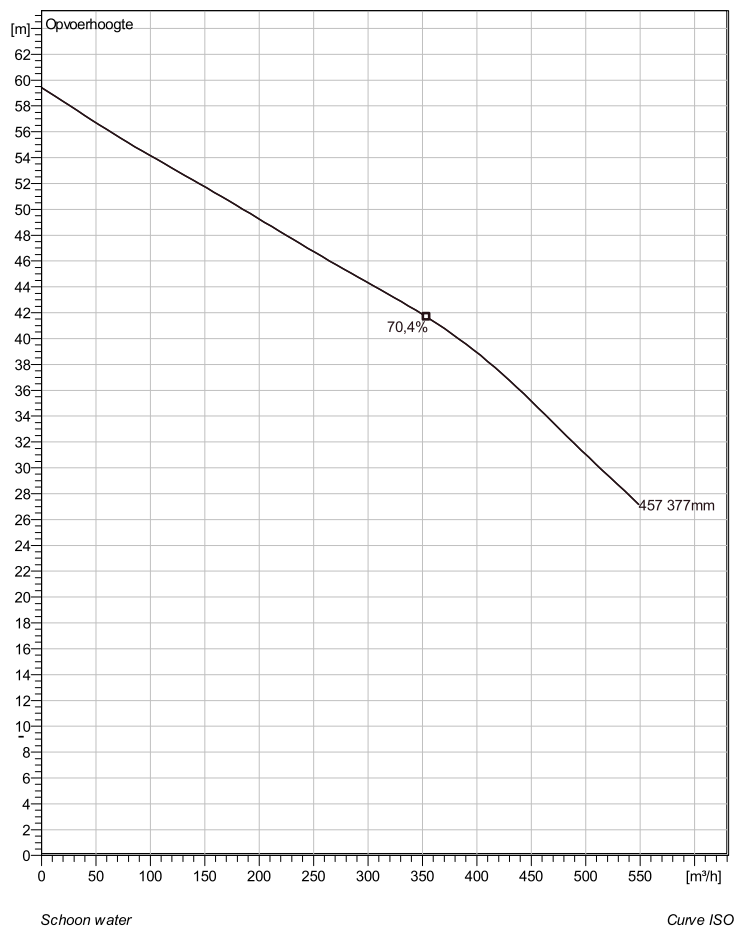

Soort installatie: Semi permanent, Nat

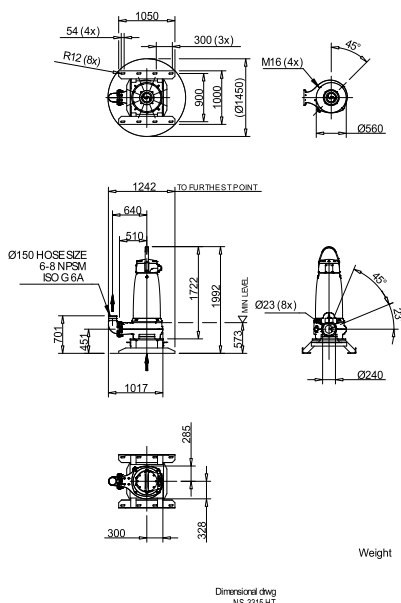

Note: Picture might not correspond to the current configuration.

General

Dompelpompen voorzien van verstoppingsongevoele N-waai. Geschikt voor afvalwater met grotere delen zoals rioolwater, regenwater en industriële afvalwater. Materiaal gietijzer.

Impeller

Impeller material	Grey cast iron
Persaansluiting	150 mm
Diameter aanzuigzijde	150 mm
Impeller diameter	377 mm
Aantal bladen	3

Motor

Motor #	N3315.180 35-35-4AA-W 85KW standaard
Stator variant	1
Frequentie	50 Hz
Nominale spanning	380 V
Aantal polen	4
Fasen	3~
Nominaal vermogen	85 kW
Toegekende stroom	163 A
Aanloopstroom	670 A
Nominaal toerental	1475 rpm
Vermogensfactor	
1/1 Load	0,85
3/4 Load	0,83
1/2 Load	0,76
Motor efficiency	
1/1 Load	92,6 %
3/4 Load	94,0 %
1/2 Load	94,7 %

Project	Project ID	Created by	Created on 10/5/2018	Last update
---------	------------	------------	-------------------------	-------------

NS 3315 HT 3~ 457



Karakteristiek


Pomp

Persaansluiting 150 mm
Diameter aanzuigzijde 150 mm
Impeller diameter 377 mm
Aantal bladen 3

Motor


Motor # N3315.180 35-35-4AA-W 85KW
Stator variant 1
Frequentie 50 Hz
Nominale spanning 380 V
Aantal polen 4
Fasen 3~
Nominale vermogen 85 kW
Toegekende stroom 163 A
Aanloopstroom 670 A
Nominale toerental 1475 rpm

Vermogensfactor
1/1 Load 0,85
3/4 Load 0,83
1/2 Load 0,76
Motor efficiency
1/1 Load 92,6 %
3/4 Load 94,0 %
1/2 Load 94,7 %

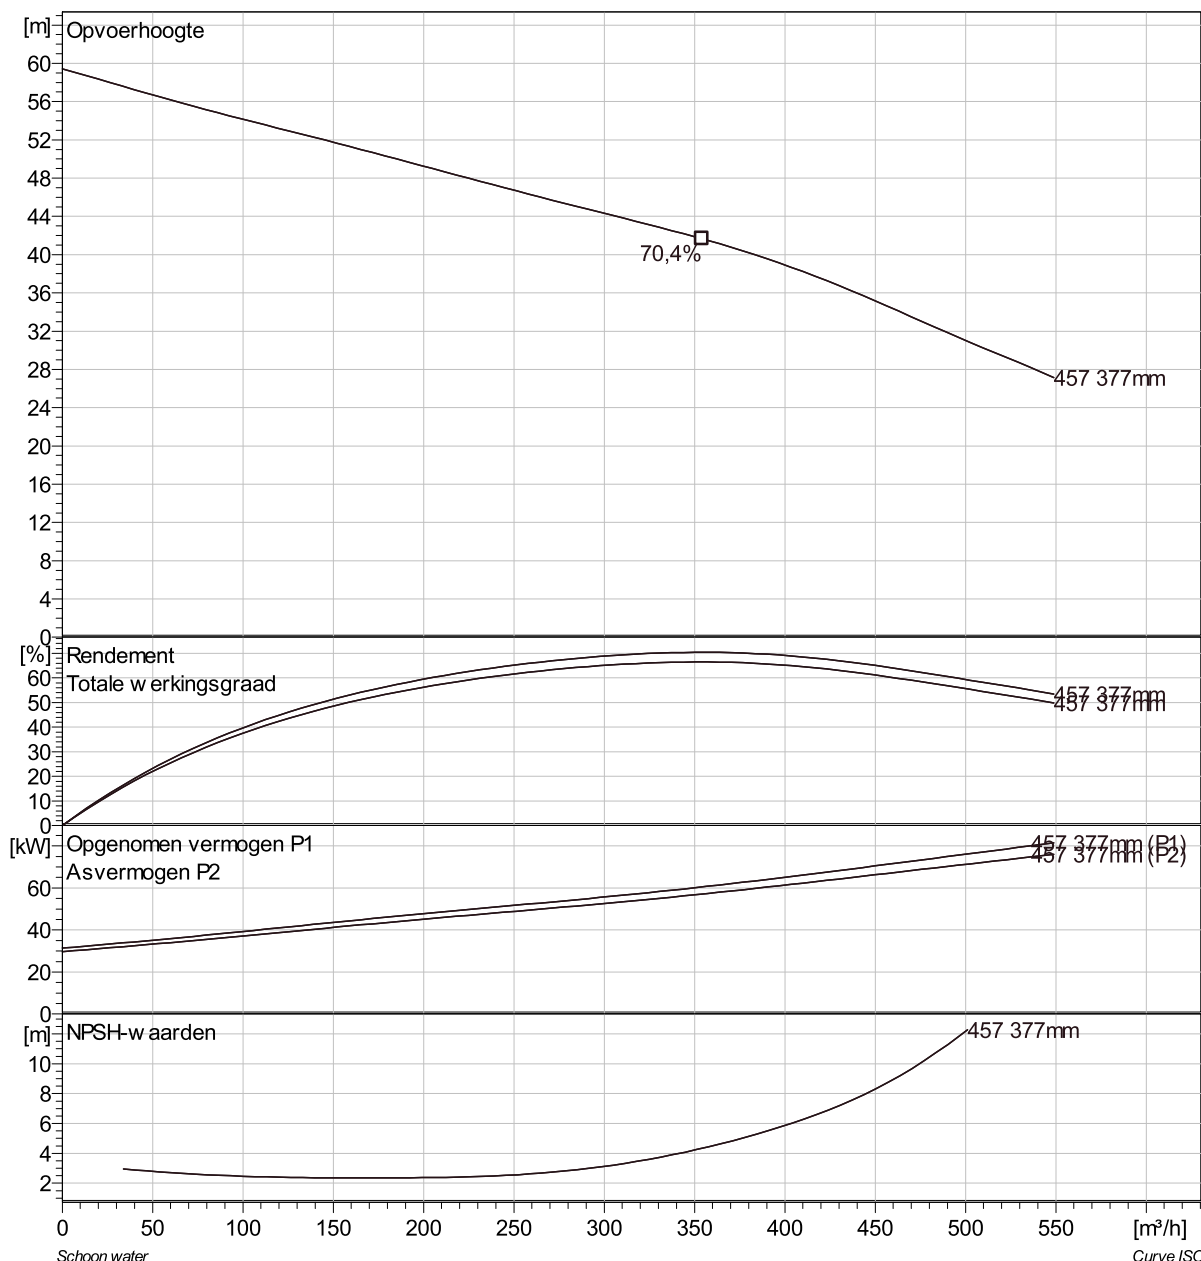

Project	Project ID	Created by	Created on	Last update
			10/5/2018	


NS 3315 HT 3~ 457
VFD Analysis

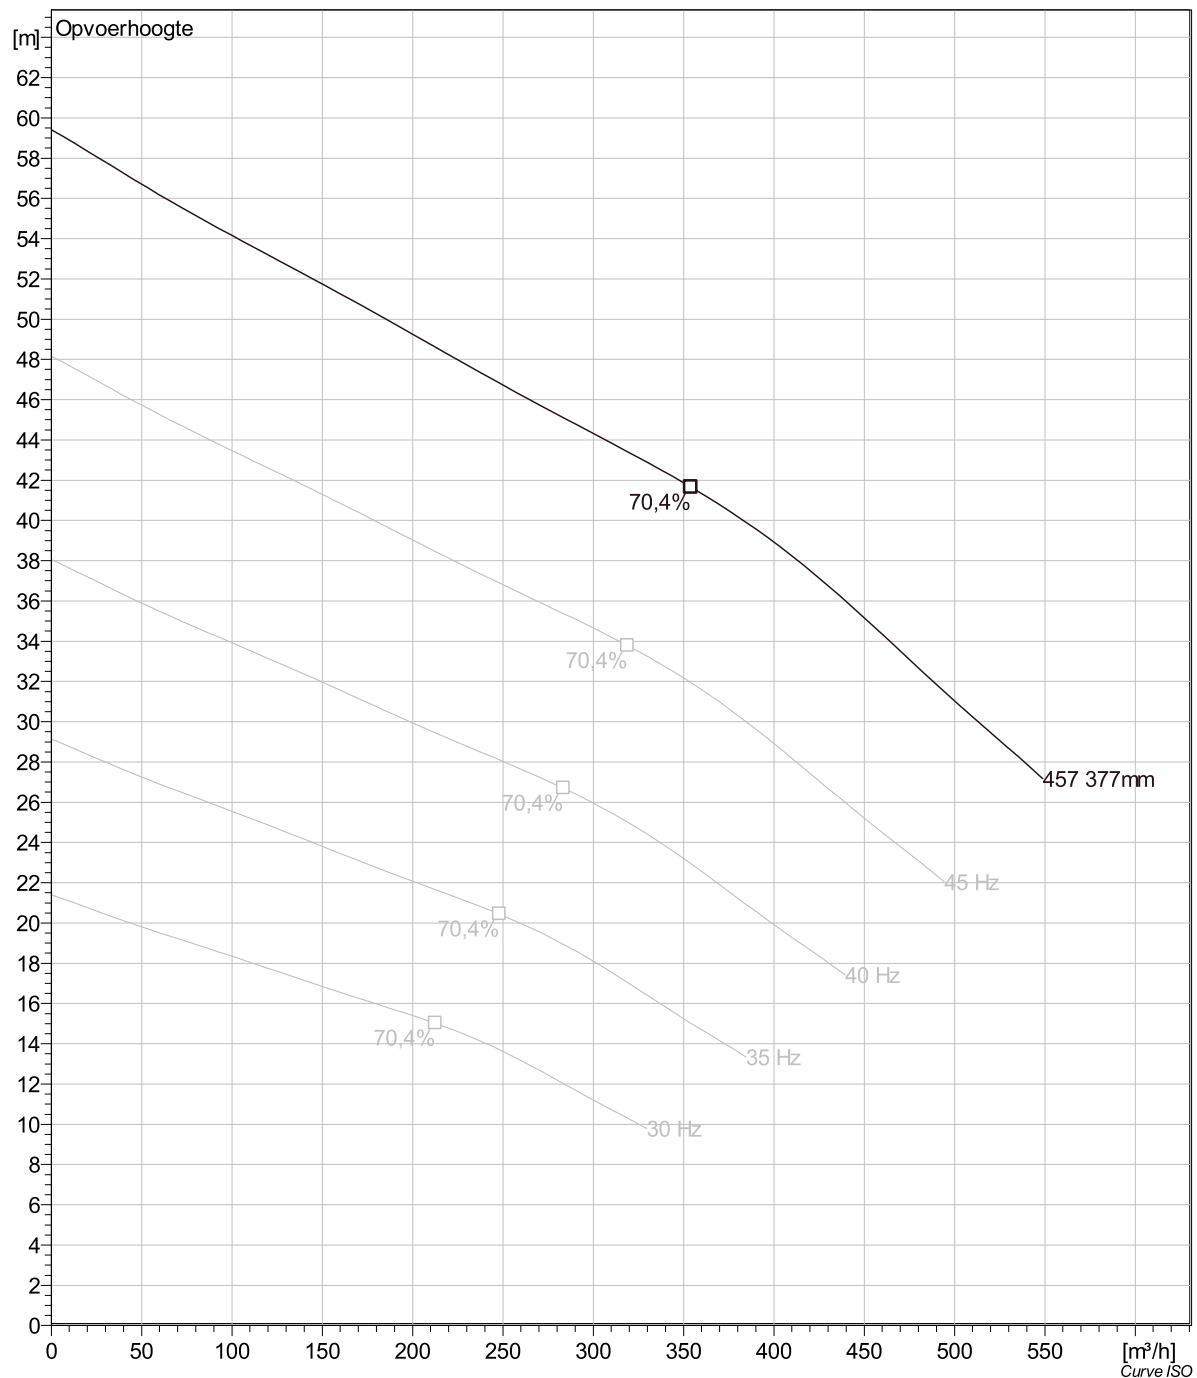

Project	Project ID	Created by	Created on 10/5/2018	Last update
---------	------------	------------	-------------------------	-------------

NS 3315 HT 3~ 457

Dimensional drawing

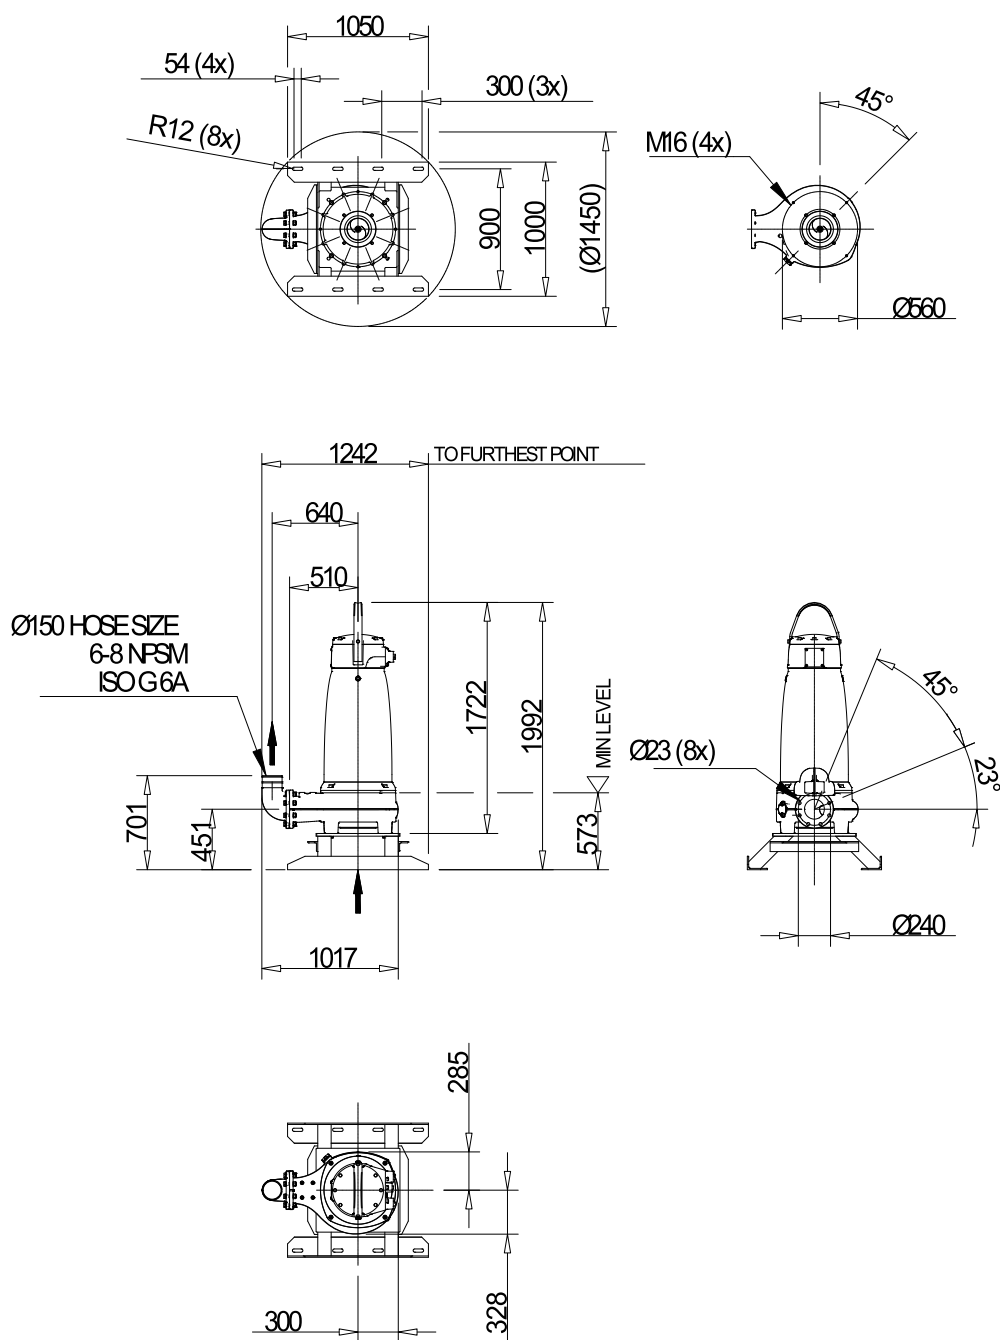

Weight

Dimensional dwg
NS 3315 HT

Project	Project ID	Created by	Created on	Last update
			10/5/2018	