

**HEAVY DUTY SEWAGE GRINDER PUMPS  
TUNGSTEN CARBIDE CUTTERS**

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
<b>SINGLE PHASE</b>						
GS-1200 1¼" MAN 230v	32.6	510 x 170 x 310	120/20	1.2	020-702	
GS-1200 1¼" AUTO 230v	32.6	510 x 170 x 310	120/20	1.2	020-702A	
GS-1200 1¼" MAN 110v	32.6	510 x 170 x 310	120/20	1.2	020-704	
GS-1200 1¼" AUTO 110v	32.6	510 x 170 x 310	120/20	1.2	020-704A	
GS-1500 1¼" MAN 230v	36.2	565 x 180 x 315	150/25	1.5	020-707	
GS-1500 1¼" AUTO 230v	36.2	565 x 180 x 315	150/25	1.5	020-707A	
<b>THREE PHASE</b>						
GST-12 1¼" 415v	30	460 x 170 x 310	120/20	1.2	020-712	
GST-15 1¼" 415v	33.8	490 x 180 x 315	150/25	1.5	020-715	
GST-22 2" 415v	48.8	550 x 235 x 370	320/26	2.2	020-720	
GST-37 2" 415v	53	560 x 235 x 370	320/36	3.7	020-737	




GS-1200 Auto

GS grinder pumps have tungsten carbide cutters and grinding rings which allow up to 28,000 cuts per minute. Used for domestic and industrial applications where either high heads or long distances prohibit the use of standard submersibles or large bore discharge pipe is not available or uneconomical to install. Hosetails are supplied with all models.

Free standing or can be guide rail mounted. See bottom of page for guide rail price.

When used in sewage package stations and full control is required see page 27.

For basic control panels see page 26. For float switches see pages 28 and 29.

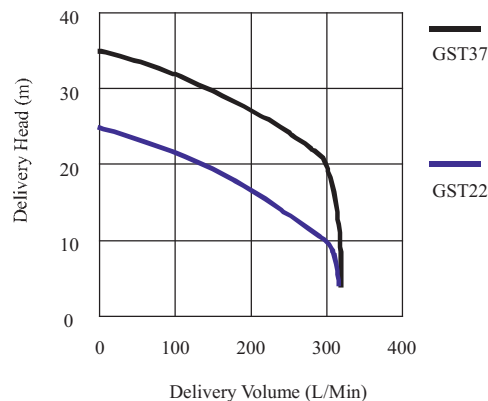

Cutter & Cutting Ring

**GUIDE RAIL SETS SUITS ALL MODELS**

MODEL	OUTLET	CODE	PRICE
JS-2" SR-50S	2"	020-501S	



SR-50