

JS HEAVY DUTY CONTRACTOR PUMPS
SINGLE PHASE

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
JS-250 MAN 230v 1½"	12.5	370 x 150 x 220	200/10	0.25	011-200	
JS-250 AUTO 230v 1½"	12.5	370 x 150 x 220	200/10	0.25	011-200A	
JS-250 MAN 110v 1½"	12.5	370 x 150 x 220	200/10	0.25	011-202	
JS-250 AUTO 110v 1½"	12.5	370 x 150 x 220	200/10	0.25	011-202A	
JS-400 MAN 230v 2"	15	420 x 150 x 220	240/12	0.4	011-400	
JS-400 AUTO 230v 2"	15	420 x 150 x 220	240/12	0.4	011-400A	
JS-400 MAN 110v 2"	15	420 x 150 x 220	240/12	0.4	011-402	
JS-400 AUTO 110v 2"	15	420 x 150 x 220	240/12	0.4	011-402A	
JS-750 MAN 230v 2"	27	480 x 195 x 255	400/15	0.75	011-750 2"	
JS-750 AUTO 230v 2"	27	480 x 195 x 255	400/15	0.75	011-750A 2"	
JS-750 MAN 110v 2"	27	480 x 195 x 255	400/15	0.75	011-752 2"	
JS-750 AUTO 110v 2"	27	480 x 195 x 255	400/15	0.75	011-752A 2"	
JS-750 MAN 230v 3"	27	480 x 195 x 285	400/15	0.75	011-750 3"	
JS-750 AUTO 230v 3"	27	480 x 195 x 285	400/15	0.75	011-750A 3"	
JS-750 MAN 110v 3"	27	480 x 195 x 285	400/15	0.75	011-752 3"	
JS-750 AUTO 110v 3"	27	480 x 195 x 285	400/15	0.75	011-752A 3"	
JS-1500 MAN 230v 3"	32	510 x 195 x 285	500/17	1.5	011-760	
JS-1500 AUTO 230v 3"	32	510 x 195 x 285	500/17	1.5	011-760A	
JS-1500 H MAN 230v 2"	32	510 x 195 x 255	250/22	1.5	011-764	
JS-1500 H AUTO 230v 2"	32	510 x 195 x 255	250/22	1.5	011-764A	



JS-400 AUTO



JS-750 MAN




MAC-3



JS-400 STAINLESS STEEL

AUTOMATIC PUMPS ARE FITTED WITH MAC3 FLOATS
ALLOW APPROX. 300mm AWAY FROM PUMP FOR FLOAT SWITCH TO OPERATE

JS & JS-High Head versions.
Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber.
Stainless steel shaft and motor case. Cast iron motor top cover, lower motor bearing/seal housing, pump case, impeller and volute. Complete with 10 metres of power cable. Hose tails are supplied with all models. Suitable for drainage applications, clean and dirty water.

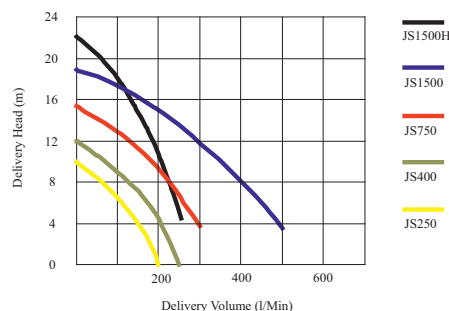

JS ALL 316 STAINLESS STEEL PUMPS

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
JS-250 MAN 230v 1½"	11	365 x 150 x 220	200/9	0.25	011-256	
JS-400 MAN 230v 2"	15	420 x 150 x 220	240/12	0.4	011-405	
JS-400 MAN 230v 60Hz 2"	15	420 x 150 x 220	240/12	0.4	011-404	

These are precision cast 316 stainless steel pumps.

JST SUBMERSIBLE PUMPS – 415v 3 PHASE

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
JST-4 2"	14	370 x 145 x 220	240/12	0.4	011-004	
JST-8 2"	24	420 x 190 x 260	380/15	0.75	011-008 2"	
JST-8 3"	24	420 x 190 x 280	380/15	0.75	011-008 3"	
JST-15 3"	28	440 x 190 x 280	500/18	1.5	011-015	
JST-22 3"	39	510 x 220 x 315	850/20	2.2	011-022	
JST-37 4"	44	525 x 220 x 320	1050/31	3.7	011-037	
JST-55 4"	66	640 x 280 x 500	1800/22	5.5	011-055	
JST-75 6"	76	720 x 280 x 500	2000/31	7.5	011-075	



JST-4



JST-15



JST-22




JST SUBMERSIBLE PUMPS 415v 3 PHASE
HIGH HEAD VERSION

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
JST-15H 2"	27	420 x 190 x 250	450/23	1.5	011-019	
JST-22H 2"	40	510 x 220 x 315	650/30	2.2	011-023	
JST-37H 2"	45	525 x 220 x 320	850/35	3.7	011-039	
JST-55H 3"	66	640 x 280 x 500	1050/32	5.5	011-057	
JST-75H 4"	76	720 x 280 x 500	1600/40	7.5	011-077	

JST and JST High Head versions

Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Stainless steel shaft and motor case. Cast iron motor top cover, lower motor/seal housing, pump case, impeller and volute. Complete with 10 metres of power cable. Hose tails are supplied with all models apart from the JST37, 55 and 75. Hose tails are supplied with the high head versions.

Suitable for drainage applications, clean and dirty water.

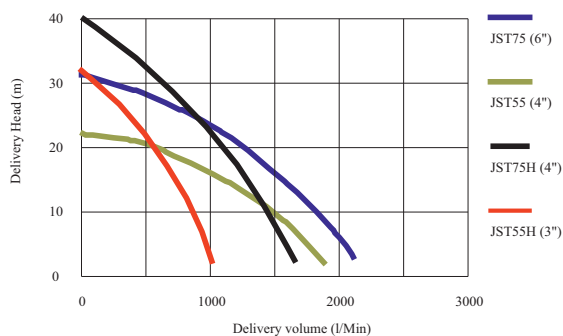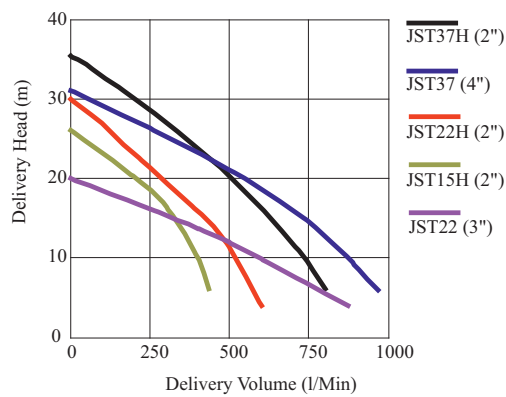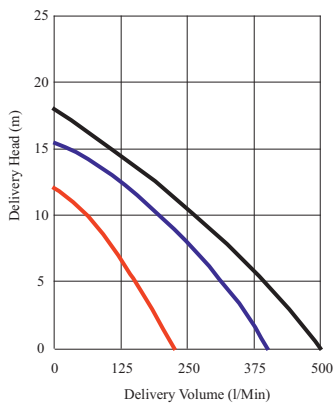

All models can be made to operate automatically, see pages 26 and 27 for control panels and pages 28 and 29 for float switches.