

# SS / SKSS / XC Series

## AISI316 range

**PUMPING LIQUIDS  
UP TO 90°C**

Durable pumps  
in cast stainless steel  
for use in  
harsh environments



# SKSS - Shredder impeller AISI316

Cast stainless steel

Suitable for pumping light chemicals



Standard cable 10m BUNA N, other materials optional

Viton twin mechanical seal CC/SIC in oil chamber

Viton packing, seals and o-rings

Solids handling up to 60mm

**Optional:**  
**Pumping liquids up to 70°C**  
**Single channel impeller**

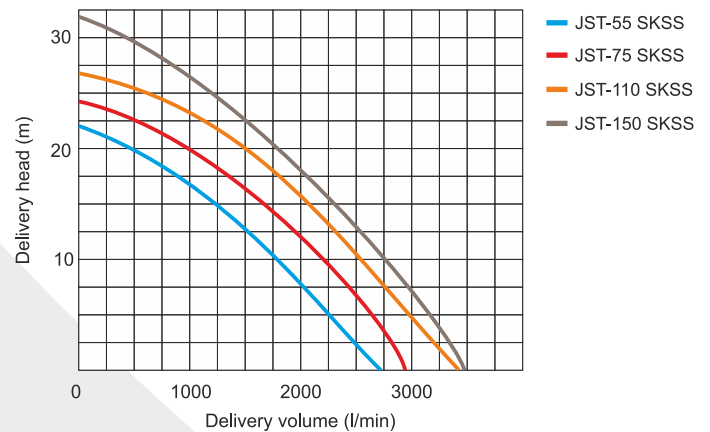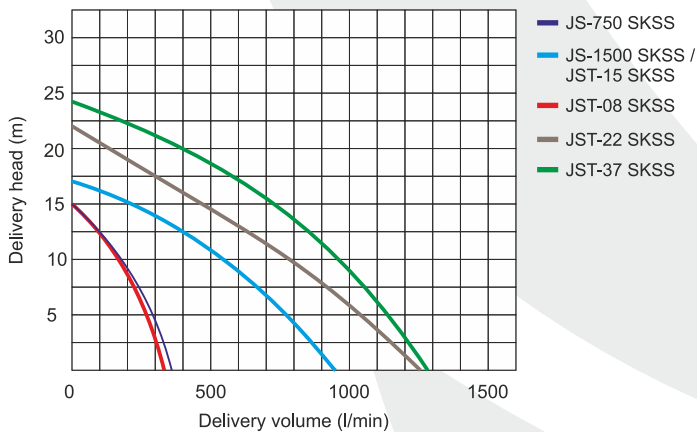

Model	Voltage 50Hz	Max. Head M	Max. Capacity l/min	Max. Solids (mm)	Output KW	Amp.	Outlet Inch (mm)	Weight KG
JS-750 SKSS	1 Phase 230v	15	345	21	0.75	6.8	2" (50)	27
JS-1500 SKSS		17	945	44	1.5	12	3" (80)	38
JST-8 SKSS	3 Phase 400v	15	310	21	0.75	1.8	2" (50)	26
JST-15 SKSS		17	950	44	1.5	3.2	3" (80)	35
JST-22 SKSS		20	1250	44	2.2	4.6	3" (80)	43
JST-37 SKSS		24	1285	35	3.7	7.9	4" (100)	47
JST-55 SKSS - 4 pole		22	2730	60	5.5	11.5	4" (100)	140
JST-75 SKSS - 4 pole		24	2935	60	7.5	15.2	4" (100)	150
JST-110 SKSS - 4 pole	26.5	3330	50	11	22.7	6" (150)	220	
JST-150 SKSS - 4 pole	32	3355	55	15	29.9	6" (150)	235	

# SS - Drainage pumps AISI316

Cast 316 stainless steel

Suitable for pumping light chemicals



Standard cable 10m BUNA N, other materials optional

Viton twin mechanical seal CC/SIC in oil chamber

Viton packing, seals and o-rings

Solids handling up to 10 mm

**Optional:  
Pumping liquids up to 70°C**

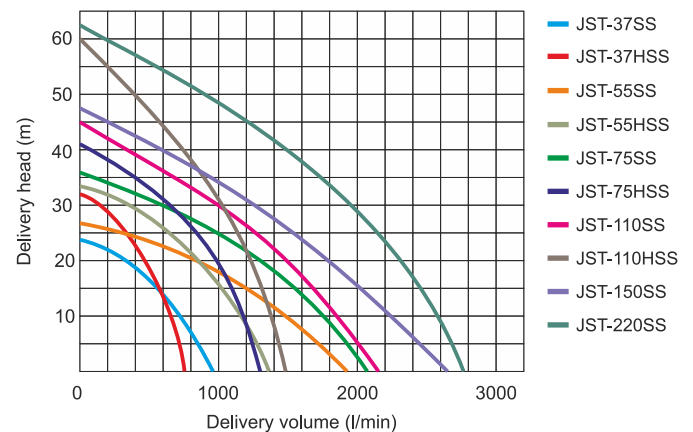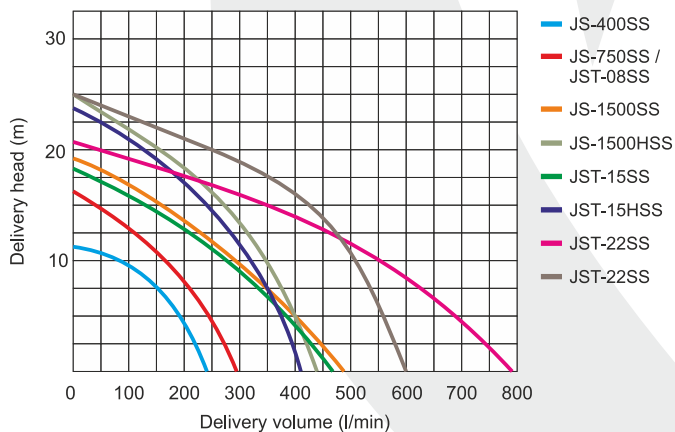

Model	Voltage 50Hz	Max. Head M	Max. Capacity l/min	Max. Solids (mm)	Output KW	Amp.	Outlet Inch (mm)	Weight KG
JS-400 SS	1 Phase 230v	11.5	240	6	0.4	3.8	2" (50)	15
JS-750 SS		16	295	6	0.75	6.8	2" (50)	26
JS-1500 SS		18	485	6	1.5	12	3" (80)	32
JS-1500H SS		25	440	6	1.5	12	3" (80)	32
JST-8SS	3 Phase 400v	16	295	6	0.75	1.8	2" (50)	21
JST-15SS		17	465	6	1.5	3.2	3" (80)	26
JST-15HSS		23	415	6	1.5	3.2	3" (80)	26
JST-22SS		21	780	10	2.2	4.6	3" (80)	39
JST-22HSS		25	600	10	2.2	4.6	3" (80)	39
JST-37SS		24	965	10	3.7	7.9	3" (80)	45
JST-37HSS		32	745	10	3.7	7.9	3" (80)	45
JST-55SS		26	1920	10	5.5	11.5	4" (100)	65
JST-55HSS		33.5	1365	10	5.5	11.5	4" (100)	65
JST-75SS		35.5	2065	10	7.5	15.2	4" (100)	75
JST-75HSS		41	1300	10	7.5	15.2	4" (100)	75
JST-110SS		45	2140	10	11	22.7	6" (150)	85
JST-110HSS		60	1470	10	11	22.7	6" (150)	85
JST-150SS		47.5	2615	10	15	29.9	6" (150)	167
JST-220SS		61	2710	10	22	43.5	6" (150)	183

# XC Series - High temperature AISI316

Cast stainless steel



Standard cable 10m BUNA N, other materials optional

Viton twin mechanical seal CC/SIC in oil chamber

Viton packing, seals and o-rings

Solids handling up to 10 mm (XC) or 55mm (XC SUS)

**Suitable for pumping liquids up to 90°C**

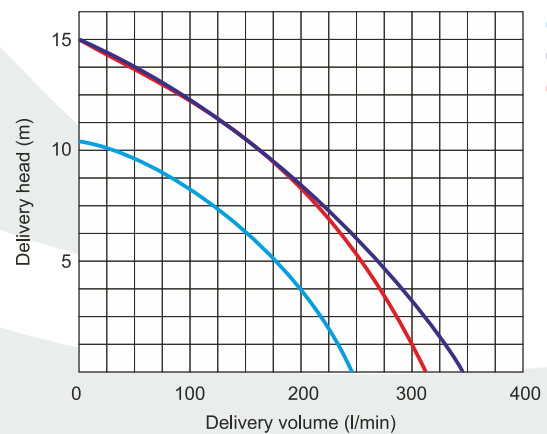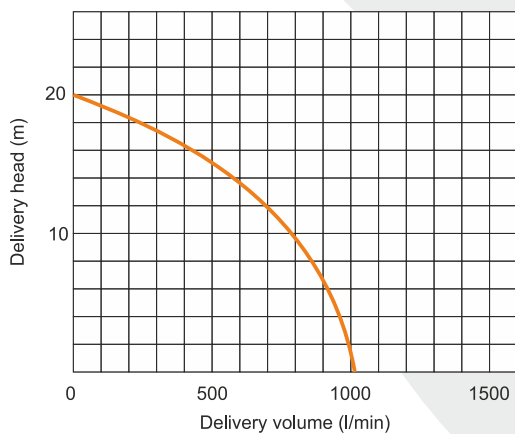

Model *	Voltage 50Hz	Max. Head M	Max. Capacity l/min	Max. Solids (mm)	Output kW	Amp.	Outlet Inch (mm)	Weight KG
JS-400 XC	1 Phase	11.5	240	6	0.4	3.8	2" (50)	15
JS-750XC SUS	230v	15	345	21	0.75	6.8	2" (50)	27
JST-8XC SUS	3 Phase	15	310	21	0.75	1.8	2" (50)	26
JST-22XC SUS	400v	20	1010	44	2.2	4.6	3" (80)	43

\* Other models available upon request

T +31 (0)294-457712 info@pomppdirect.nl www.pomppdirect.nl