



■ MODEL SS-SERIES

316 stainless steel construction.

Double mechanical seals.

Class F motor insulation.

Shaft sleeve saves on shaft wear due to abrasives and corrosion.

Additional lip seal protection keeps impurities and abrasives away from the mechanical seals.

Thermal overload protection guards against high amperage and high temperature.

Available with slide rail system to save maintenance cost and time.

Enhanced cable entry sealing system.



JS250SS

■ APPLICATIONS

Suitable for drainage of:

Clean water

Slightly waste water

Corrosive water




Light chemicals

Salt water



JST37SS

■ PERFORMANCE CURVE

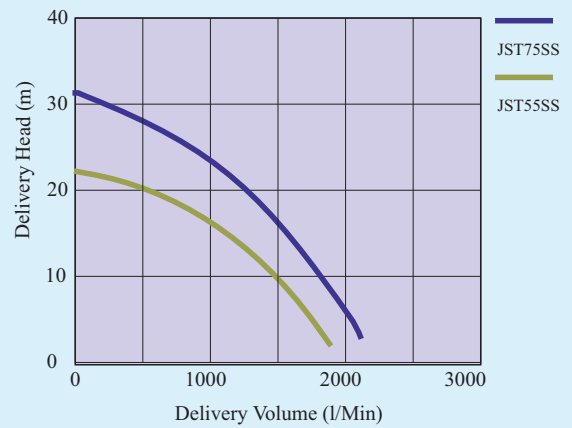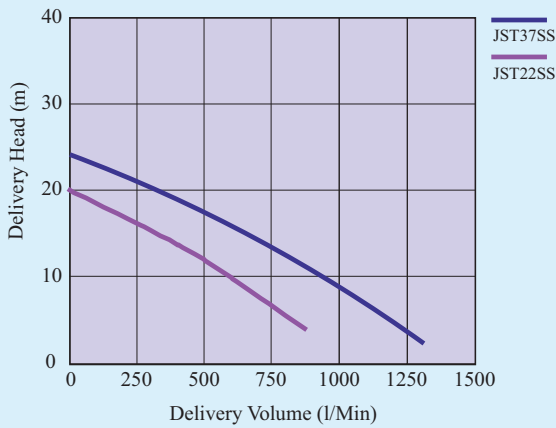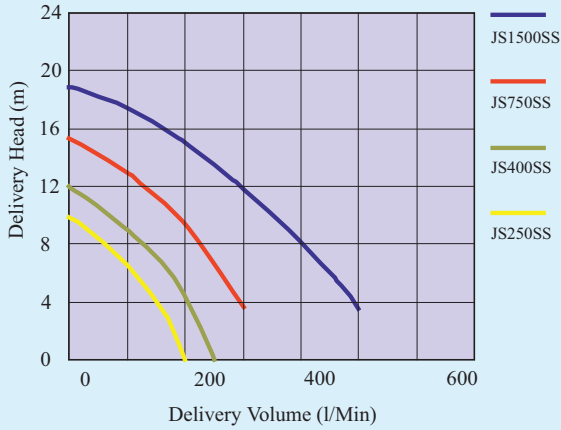

■ SPECIFICATIONS

Pump Type	Outlet Diameter Inch (mm)	Output KW	Voltage 50Hz	Max.		Weight KG
				Head M	Capacity l/min	
JS-250SS	1,5" (40)	0,25	1 Phase 230v	10	200	12,5
JS-400SS	2" (50)	0,40		12	240	15
JS-750SS	2" (50)	0,75		15	400	27
JS-1500SS	3" (75)	1,50		19	720	32
JST-08SS	2" (50)	0,75	3 Phase 400v	15	380	24
JST-15SS	3" (75)	1,50		18	500	28
JST-22SS	3" (75)	2,20		20	850	39
JST-37SS	4" (100)	3,70		24	1300	44
JST-55SS	4" (100)	5,50		22	1800	66
JST-75SS	6" (150)	7,50		31	2000	76