

**JST SEWAGE PUMPS – 415v 3-PHASE
SV VERSIONS – VORTEX IMPELLER**

MODEL	Kg	H x W x L mm	LM/HM	kW	CODE	PRICE
JST-4 SV 2"	15.4	415 x 140 x 215	240/8	0.4	012-698	
JST-8 SV 3"	29.4	470 x 170 x 345	550/9	0.75	012-768	
JST-15 SV 3"	36.6	515 x 170 x 395	700/10	1.5	012-774	
JST-22 SV 3" 2 POLE	52.2	580 x 210 x 430	900/11	2.2	011-026	
JST-22 SV 3" 4 POLE	59.6	650 x 255 x 480	1400/8	2.2	011-025	
JST-37 SV 3"	61.2	660 x 255 x 480	1400/14	3.7	011-040	
JST-55 SV 4"	99.6	830 x 310 x 650	2600/12	5.5	012-788	
JST-75 SV 4"	110	830 x 310 x 650	3000/17	7.5	012-792	




JST-SV versions are submersible sewage vortex impeller pumps allowing soft solids to be passed through the pump body to waste. Available as free standing as standard or can be guide rail mounted. See bottom of page for guide rail prices. Cast iron pump body, impeller, lower motor bearing/seal housing and motor top cover. Stainless steel shaft and motor casing. Twin mechanical seals, carbon ceramic and silicon carbide in a lubricated chamber. Complete with 10 metres of power cable. Hose tails are supplied up to model JST-37 SV. JST-4 SV – 36mm solids handling, JST-08 SV – 36mm, JST-15 SV – 46mm, JST-22 SV – 65mm, JST-37 SV – 57mm, JST55 SV & 75SV – 80mm solids handling.



JST-4 SV



JST-15 SV

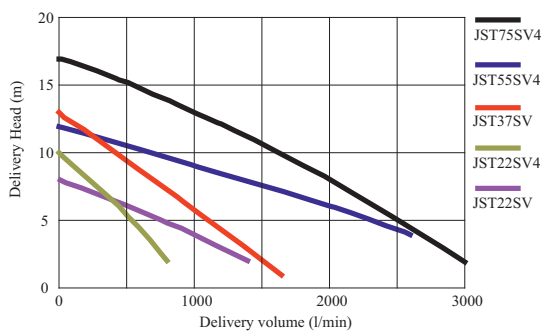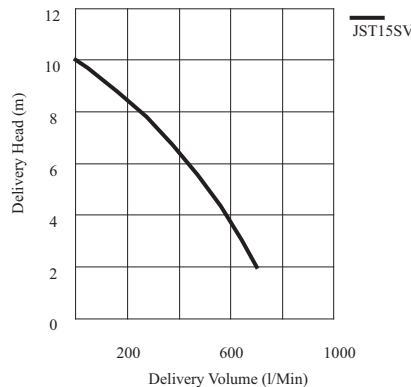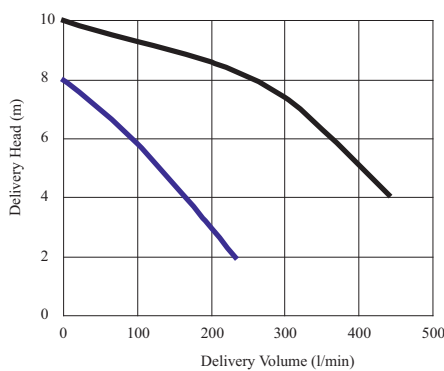

All models can be made to operate automatically, see pages 26 & 27 for control panels and pages 28 & 29 for float switches.



SR-50H



SR-80/100

**GUIDE RAIL SETS
DIMENSIONS ON PAGE 18**

MODEL	OUTLET	CODE	PRICE
JS-2" SR-50H	2"	020-501H	
JS-3" SR-80	3"	020-504	
JS-4" SR-100	4"	020-506	

FOR CONTROL PANELS AND FLOAT SWITCHES PLEASE SEE PAGES 26 - 29