

Pump type: Submersible Duplex pump

Application: Waste water, Seawater

Pump data

Solids passage	65 mm
Discharge/ Suction diameter	65 mm/ 65 mm
Impeller type:	Vortex
Impeller diameter	150 - 125 mm
Recommended min. flow	2 l/sec (8 m3/h)
Weight	48 kg

Motor

Mains:	50 c/s – 3 phase
Rated shaft power	4.0 kW
Rated electrical power	5.0 kW
Nominal speed	2840 rpm
Motor efficiency	80 %
Power factor (cos phi)	0.85
Degree of protection	IP 68
Isolation class	F (155°C)
Max. water temperature	40°C
Standard cable length	10 m

Materials

Pump casing	AISI 329
Impeller	AISI 329
Motor unit	AISI 329
Shaft	AISI 316
Bolts	AISI 316
Elastomers	Viton (FPM)
Electrical cable	Neoprene (CR)
Seal lubrication	Oil
Seal pump side	Silicon carbide – Silicon carbide - Viton
Seal motor side	Carbon - Ceramic

Installation options

Guide bar coupling OWK 080





Freestanding
Including support (VRS) 75 mm hose connection or
G 3" threaded connection



Optional

- Flameproof version, to class: II 2 G Ex d IIB c T4
Standard: II 2 G Ex b c d IIB T4 Gb
With Frequency control: II 2 G Ex b c d IIB T3 Gb
- Thermo switches in stator windings
(standard for flame proof version)
- Cable protective sheathing (AISI 316)
- Water detector in motor and oil chamber
Flameproof version with external cable

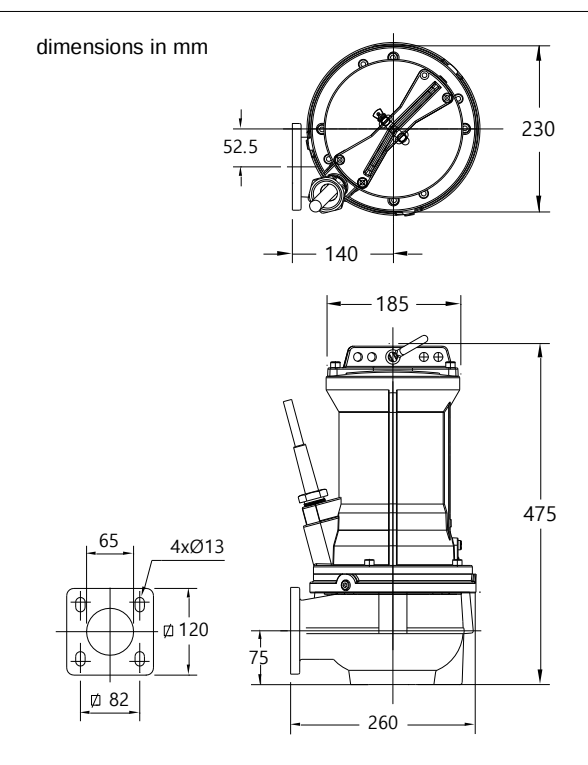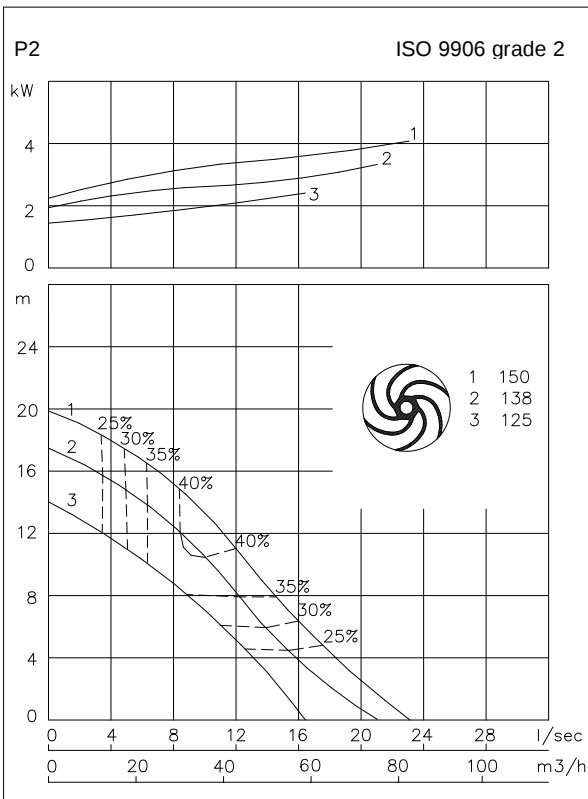

		Electrical cable size [mm ²]		motor protection and/or water detector		flameproof version	
voltage	current	direct start	stardelta start	direct start	stardelta start	direct start	
[V]*	[A]						
230	14.8	4G1.5	7G1.5	7G1.5	12G1.5	7G1.5	12G1.5
400	8.5	4G1.5	7G1.5	7G1.5	12G1.5	7G1.5	12G1.5
500	6.8	4G1.5	7G1.5	7G1.5	12G1.5	7G1.5	12G1.5
starting current DOL start : 6.2 x rated current							
starting current YD start : 2.1 x rated current						* other voltages on request	

Connections

Pompdirect datasheet DWP22-20BH-U-E2-14
We reserve the right to alter specification without prior notice.
T +31 (0)294-457712 info@pompdirect.nl