

Pump type: Submersible Duplex Pump

Application: Waste water, Seawater

Pump data

Solids passage	100 mm
Discharge/ Suction diameter	100 mm / 110 mm
Impeller type:	Vortex
Impeller diameter	252 - 225 mm
Recommended min. flow	6 l/sec (21 m3/h)
Weight	125 kg

Motor


Mains:	50 c/s – 3 phase
Rated shaft power	13.0 kW
Rated electrical power	15.1 kW
Nominal speed	1420 rpm
Motor efficiency	86 %
Power factor (cos phi)	0.84
Degree of protection	IP 68
Isolation class	F (155°C)
Max. water temperature	40°C
Standard cable length	10 m

Materials


Pump casing	AISI 329
Impeller	AISI 329
Motor unit	AISI 329
Shaft	AISI 316
Bolts	AISI 316
Elastomers	Viton (FPM)
Electrical cable	Neoprene (CR)
Seal lubrication	Oil
Seal pump side	Silicon carbide – Silicon carbide - Viton
Seal motor side	Carbon – Ceramic

Installation options

Guide bar coupling OWK 100



Freestanding or
Including support (VRS) 100mm hose connection
G 4" threaded connection




Optional

- Flameproof version, to class: II 2 G Ex d IIB c T4
Standard: II 2 G Ex b c d IIB T4 Gb
With Frequency control: II 2 G Ex b c d IIB T3 Gb
- Thermo switches in stator windings
(standard for flame proof version)
- Cable protective sheathing (AISI 316)
- Water detector in motor and oil chamber
Flameproof version with external cable

Connections

voltage	current	Electrical cable size [mm2]		motor protection and/or water detector		flameproof version	
		direct start	stardelta start	direct start	stardelta start	direct start	stardelta start
230	45.4	4G10	2x4G6	4G10 + 4G1.5	-	4G10 + 4G2.5	-
400	26.1	4G6	7G2.5	4G6 + 4G1.5	7G2.5 + 4G1.5	4G6 + 4G2.5	7G2.5 + 4G2.5
500	20.9	4G6	7G1.5	4G6 + 4G1.5	12G1.5	4G6 + 4G2.5	12G1.5
starting current DOL start : 5.0 x rated current							
starting current YD start : 1.7 x rated current							
						* other voltages on request	

P2 ISO 9906 grade 2

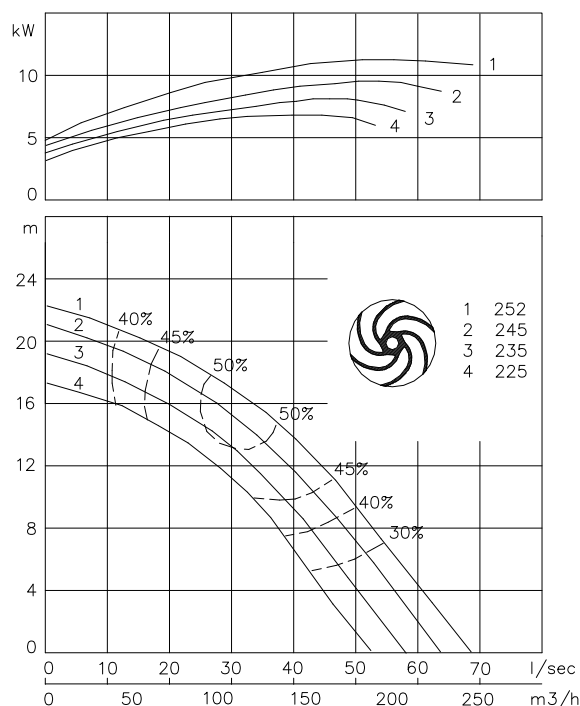

dimensions in mm

