

Pump type: Submersible slurry pump  
 Application: Abrasive media

**Pump data**

Solids passage 100 mm  
 Discharge/ Suction diameter 150 mm/ 145 mm  
 Impeller type: Vortex  
 Impeller diameter 242 mm  
 Recommended min. flow 13 l/sec (47 m3/h)  
 Weight 320 kg

**Motor**

Mains: 50 c/s – 3 phase  
 Rated shaft power 22.0 kW  
 Rated electrical power 26.2 kW  
 Nominal speed 1430 rpm  
 Motor efficiency 84 %  
 Power factor (cos phi) 0.82  
 Degree of protection IP 68  
 Isolation class F (155°C)  
 Max. water temperature 40°C  
 Standard cable length 10 m

**Materials**

Pump casing/ wear plate Nihard 4 (G-X300CrNiSi 9-5)  
 Impeller Nihard 4 (G-X300CrNiSi 9-5)  
 Motor unit Cast iron GG 25 (EN-GJL-250)  
 Shaft AISI 431  
 Alt: AISI 316  
 Bolts AISI 316  
 Elastomers Nitrile (NBR) or neoprene (CR)  
 Alt: viton (FPM)  
 Electrical cable Neoprene (CR)  
 Seal lubrication Oil  
 Seal pump side Silicon carbide – silicon carbide  
 Seal motor side Carbon - Ceramic  
 Coating Two components polyurethane

**Installation options**

Bottom elbow coupling OWK 150





Freestanding Including support (VRS) NW150 flanged elbow



**Optional**

- Version with agitator, see DNP62-41LF  
 Version with slim-line pump casing and agitator, see DNP62-42LF
- Flameproof version, to class: II 2 G Ex d IIB c T4  
 Standard: II 2 G Ex b c d IIB T4 Gb  
 With Frequency control: II 2 G Ex b c d IIB T3 Gb
- Cable protective sheathing (AISI 316)
- Water detector in motor and oil chamber  
 Flameproof version with external cable

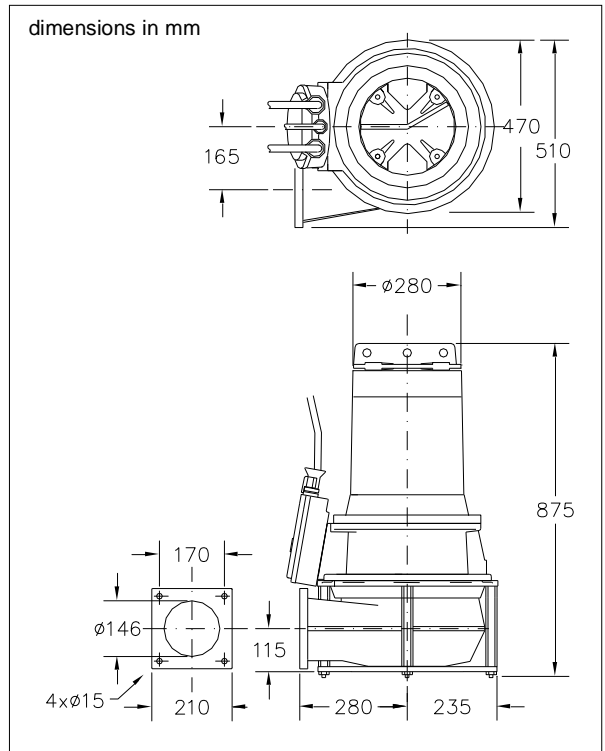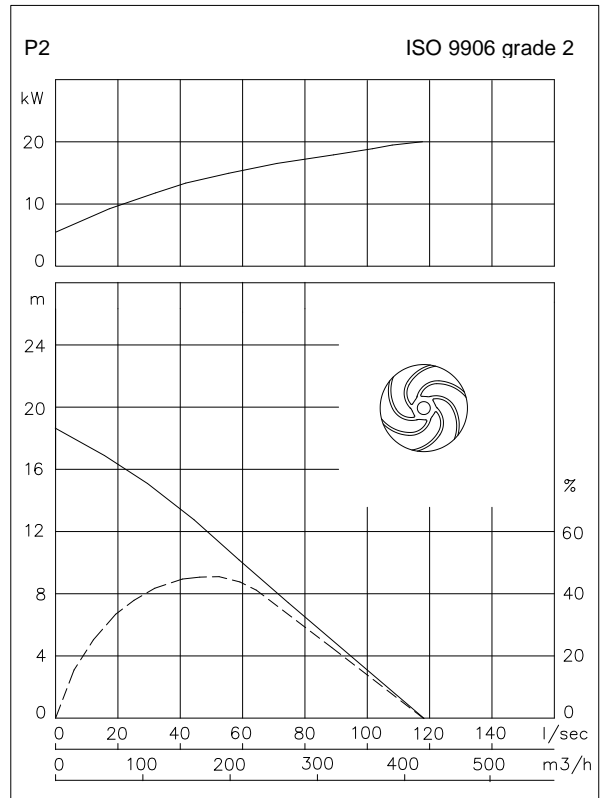

**Connections**

voltage	current	Electrical cable size [mm2]			
		motor protection and/or water detector		flameproof version	
[V]*	[A]	direct start	stardelta start	direct start	stardelta start
230	80.2	-	2x4G10 + 4G2.5	-	2x4G10 + 4G2.5
400	46.1	4G10 + 4G2.5	4G6 + 4G2.5	4G10 + 4G2.5	4G6 + 4G2.5
500	36.9	4G6 + 4G2.5	4G6 + 4G2.5	4G6 + 4G2.5	4G6 + 4G2.5
starting current DOL start : 5.7 x rated current					
starting current YD start : 1.9 x rated current					
* other voltages on request					